



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

C5730
IEWC 32031454
Tomar M3880

Issue Date: 3/29/2017
Issue: 2

Construction

Description: 2/C 18 16/30TC PVC/PVC AWM-2509		Diam. (In)
Component:	2 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	0.047"
Insulation:	0.016" Premium Grade PVC	0.079"
Color Code:	Black + Red	0.079"
Cable Assembly:	2 Conductors Bunched Cabled	0.160"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.160"
Jacket:	0.020" Premium Grade UL Recognized QMTT2 Jacket Compound	0.190"
Jacket Color:	Gray (Slate) ***Critical Avg. O.D. = .183" to .193"	

Print: .190"

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-2509	80°C	300	VW-1
Canadian cRU	AWM	80°C	300	VW-1

*** The average outside diameter of this cable taken from the minimum and maximum measurement should be between .183" and .193" . Min and max can be outside of the range.

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:

IQ17001




Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/29/2017

Issue: 2

Drawing/Rotation:

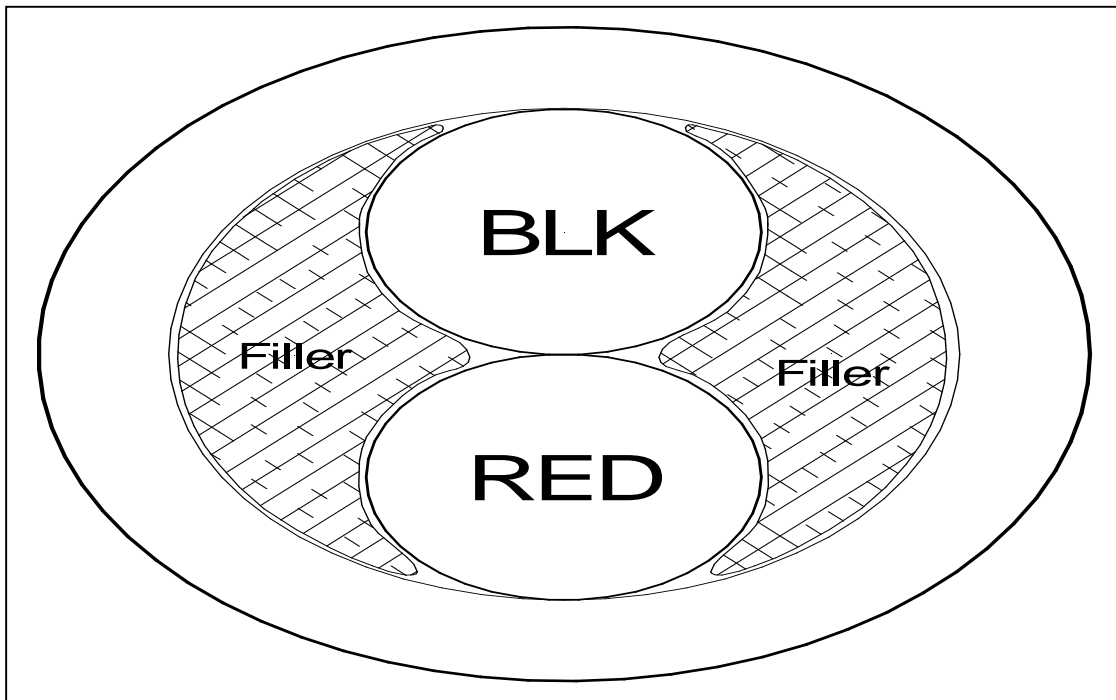

IQ17001