


#6257 ENC-MUDCCA1606



RG Wire & Cable Ltd

67 Cavendish Way
Glenrothes KY15 6SB
Scotland
Tel: +44 1592 775800
Fax: +44 1592 775822

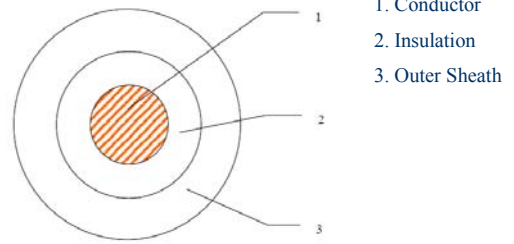

ENC-MUDCCA1606

Product Description

Application:
Ericsson power cable.

Cable Construction

1. Conductor	Tinned Copper
Construction (mm)	0.41*119
Stranded Dia. (mm ±0.2)	5.7
2. Insulation	LSZH
Thickness	1.2mm
Diameter (mm ±0.2)	8.1
Color	Black
3. Jacket	LSZH
Thickness	1.2+/-0.2
Max. Diameter (mm)	11.5
Color	Blue (RAL5015)
4. Marking (ink black, 2 times/m)	RG Wire & Cable #6257 DH4 ENC-MUDCCA1606 16mm ² [WeekYear] VW-1 90C 600V DC 001m.....

Packaging

500M/ Wooden Reel
Approx. Cable Weight 23kg/100m

Environmental Compliance

- CE: EU Directive 2011/65/EU(RoHS2):
This product complies with European Directive 2011/65/EU (RoHS Directive) of the European Parliament and of the Council of 8 June 2011. No exemptions are required for RoHS compliance on this item.
- REACH Regulation (EC 1907/2006):
This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.

Electrical Characteristics

Conductor DCR @ 20°C (68°F) (max.)	1.24
20°C Insulation Resistance(GΩ.M)	>2
Operating temperature(°C)	-40 to +90
Voltage rating(V)	600
Test voltage	2000VAC for 1 minute
Bending radius	Min 8xOD
Flame Resistant	IEC 60332-1 and UL 1685
Halogen free	IEC 60754-2
Flammability	UL1581 VW-1 IEC 60332-3-24

Reference Standard

Customer's sample spec.and the general standard

Rev	Notes	Date
A1	First release	2016/12/21