


CBC-TFL492324/RB



RG Wire & Cable Ltd
67 Cavendish Way
Glenrothes KY6 2SB
Scotland
Tel: +44 1592 775800
Fax: +44 1592 775822

Design

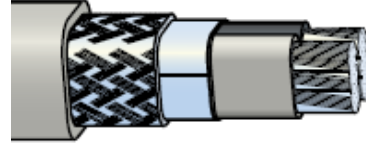

Part NO: XXXX

Product Code: CBC-TFL492324/RB

Product Description

Application:

flexible connecting cable for use in telecom

Multi-construction

2

Construction

Conductor	Tinned Copper+TCCA
Construction	(TC-15/0.3+TCCA-15/0.3)×3
Insulation	LSOH
Thickness	0.70
Insulation Dia.(±0.25mm)	(3.3×7.1)×2 Core
Insulation Color	Blue, Red
Al-Pet shield	≥125%
Braid Shield	TCCA
Construction(mm)	162/TCCA/0.2
Braid pitch	6 mesh/inch
Jacket	LSOH
Thickness(mm)	0.7
Dia.(±0.3mm)	9.5*9.5
Jacket Color	Black UV-stabilized

Marking(White ink , 2 times/m)

RG Wire & Cable #XXXX DH4 CBC-TFL 492324/RB 2 x 6mm² (2 x 10AWG) yy/ww Cable Tray

Use Telephone Central Office Power Cable Sunlight resistant 001m.....

PACKAGING

500M/Wooden Drum.

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω /Km)	3.39
Screen resistance	<5.09Ohm
Operating temperature(°C)	-20(-40 when fixed) to 90
Operating voltage(V)	100V(600V UL)
Test voltage	f=50HZ, 1 minute 2 K v AC
Bending radius	8x Outer Diameter
Fire resistance	IEC60332-3-24
	UL 1685 Vertical Tray
Weight (Nominal)(Kg/100m)	17.6

RoHS II GUIDELINE

We operate according to the following standards

Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	

Revision History

A0-1 Price NO.:

Prepare: JYL

Date: 2016/12/6

Approve:

Page: 1 of 1