



All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO
未经LEMO许可，不得擅自复制或发布

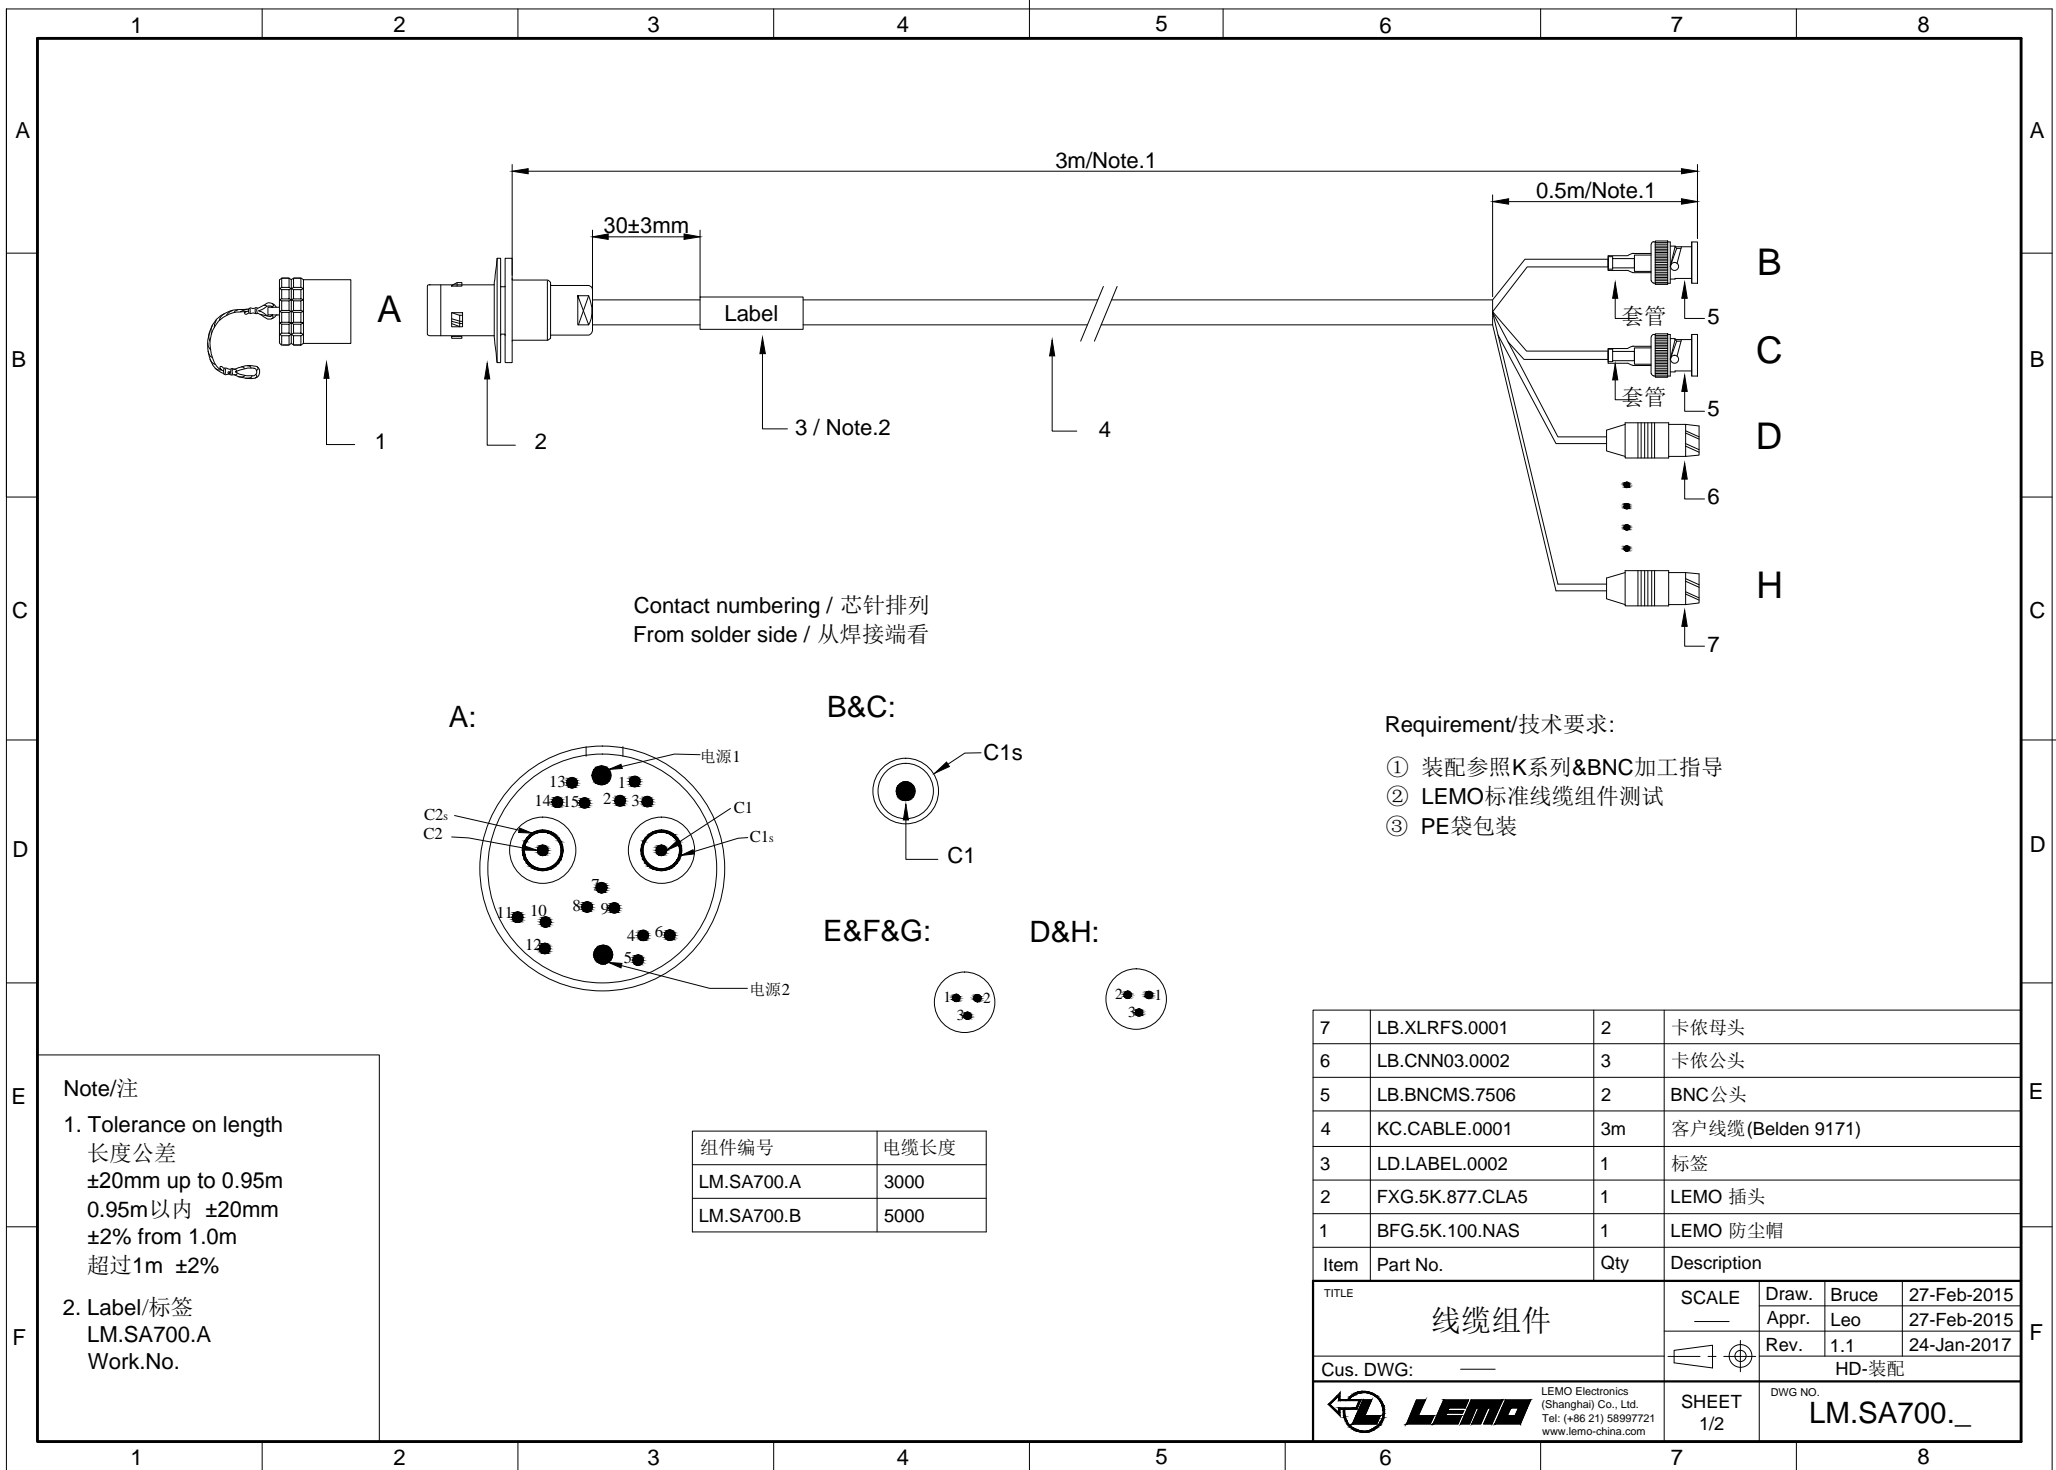

Contact numbering / 芯针排列
From solder side / 从焊接端看

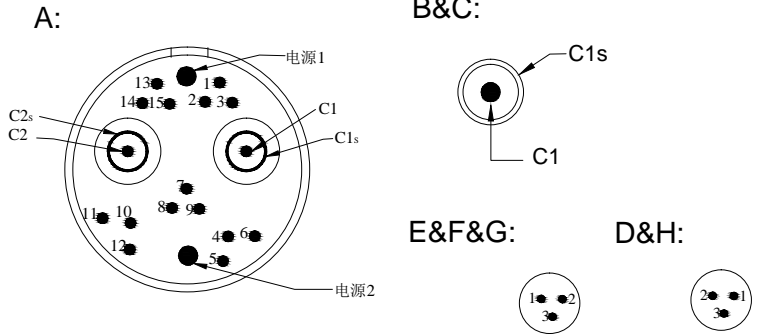

- Requirement/技术要求:
- ① 装配参照K系列&BNC加工指导
 - ② LEMO标准线缆组件测试
 - ③ PE袋包装

Note/注

1. Tolerance on length
长度公差
±20mm up to 0.95m
0.95m以内 ±20mm
±2% from 1.0m
超过1m ±2%
2. Label/标签
LM.SA700.A
Work.No.

组件编号	电缆长度
LM.SA700.A	3000
LM.SA700.B	5000

Item	Part No.	Qty	Description
7	LB.XLRFS.0001	2	卡侬母头
6	LB.CNN03.0002	3	卡侬公头
5	LB.BNCMS.7506	2	BNC公头
4	KC.CABLE.0001	3m	客户线缆(Belden 9171)
3	LD.LABEL.0002	1	标签
2	FXG.5K.877.CLA5	1	LEMO 插头
1	BFG.5K.100.NAS	1	LEMO 防尘帽

TITLE				
线缆组件			SCALE	Draw. Bruce 27-Feb-2015
				Appr. Leo 27-Feb-2015
			Rev. 1.1	24-Jan-2017
Cus. DWG: —			HD-装配	
			SHEET 1/2	DWG NO. LM.SA700._
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com				

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO
 未经LEMO许可，不得擅自复制或发布

1	2	3	4	5	6	7	8
A							A
B							B
C							C
D							D
E							E
F							F
1	2	3	4	5	6	7	8

Connection Designation / 接线表			
EGG.5K.877插座	芯线颜色		
C1	同轴1 芯	C1	BNC (B)
C1s	同轴1 网	C1s	
C2	同轴2 芯	C2	BNC (C)
C2s	同轴2 网	C2s	
1	地线	1	卡依头D (母头)
2	黄	2	
3	黑	3	
4	地线	1	卡依头E (公头)
5	红	2	
6	黑	3	
7	地线	1	卡依头F (公头)
8	白	2	
9	黑	3	
10	地线	1	卡依头G (公头)
11	蓝	2	
12	黑	3	
13	地线	1	卡依头H (母头)
14	绿	2	
15	黑	3	
电源1	紫		
电源2	橙		
外壳	屏蔽网		

TITLE 线缆组件	SCALE	Draw.	Bruce	27-Feb-2015
	—	Appr.	Leo	27-Feb-2015
Cus. DWG: —		Rev.	1.0	24-Jan-2017
		HD-装配		
	SHEET	DWG NO.		
	2/2	LM.SA700.A		

LEMO Electronics
 (Shanghai) Co., Ltd.
 Tel: (+86 21) 58997721
 www.lemo-china.com