

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 TINNED COPPER	.030"
INSULATION:	POLYVINYLCHLORIDE .010" NOM. WALL THICKNESS	.050"
CABLE:	(4) INSULATED CONDUCTORS TWISTED TOGETHER WITH A 2" LAY TO FORM A CABLE CORE	.121"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .185"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 22.0 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL 25 PF/FT  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL AWM STYLE 2464


5) APPLICATION:  
 RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7125R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. RED  
 3. WHITE  
 4. GREEN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

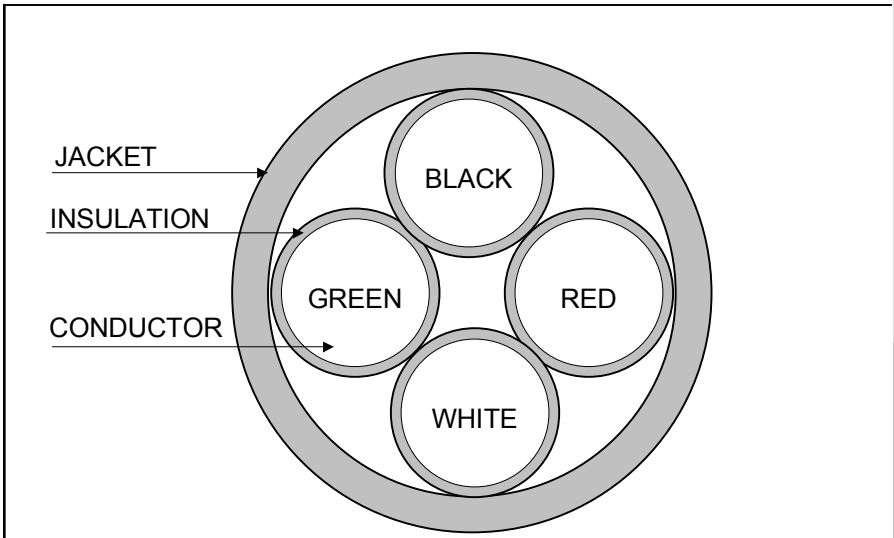

REVISION 06	DATE:	DRAWN J. RIVERNIDER 10/19/94	
REVISED BY	<i>B. Duczynski</i> 1/14/08	CHECKED G. MELNIK 10/20/94	
CHECKED	<i>J. Rivernider</i> 1/15/08	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			4/C 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7125 1 OF 1