


REV.	DESCRIPTION	DATE
0	Initial release.	3/24/2016
1	Adjust OD to ISO-6722-1 limits and BC conductor	4/19/2016
General Properties	0.5mm ² XLE 200	
Application	Vehicles	
General Composition of Cable	See Below	

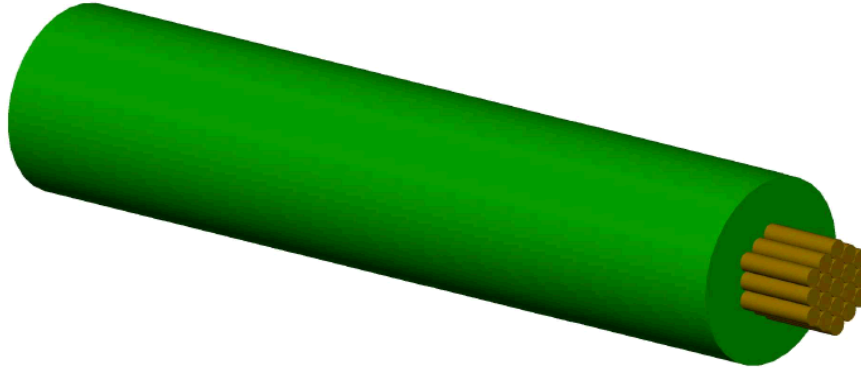

Dash no.	Color
001	Gray
002	VT/OR
003	White
004	Red

Physical Data		Dimensions (Nom.)	
Description		inches	mm
1. Conductor:	0.5 mm ² 19/.18 bare copper	0.035	0.89
2. Insulation:	EXRAD XLE 200 wall thickness: 0.41 mm	0.062	1.57
		Tolerance	.055"-.063"


Electrical Data

Conductor Resistance: 37.1 ohms/km @20° C nominal
Voltage Rating: 60 volts max
Meets Requirements of: ISO-6722-1 with exception of insulated diameter

General Data

Use: Low Tension Powertrain wire
Temperature Range: -40° C to +200° C 3,000 Hours

Bend Radius: inches mm
Fixed 0.3 7.9

	TITLE	
	0.5mm ² 19/.18mm BC XLE 200	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES	DRN. Richard Antic	DATE 3/24/2016
	CKD. Nathan Bacon	DATE 4/12/2016
DO NOT SCALE THIS DRAWING	SIZE A PART NUMBER 15-08159-xxx	DOCUMENT NUMBER 15371
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.		PAGE 1 of 1