


DIMENSIONS & TOLERANCES PER ANSI Y14.5M-1994 & ECC ENGINEERING STANDARDS

REV.	DATE	E.O.	REV.	DATE	E.O.	REV.	DATE	E.O.	REV.	DATE	E.O.	REV.	DATE	E.O.	REV.	DATE	E.O.

HONEYWELL PART NUMBER	REV
32327477-001	04

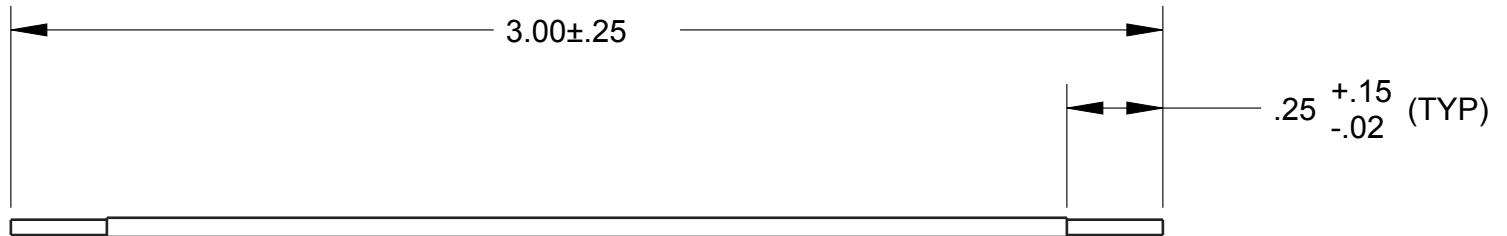

1. WIRE - 105°C, 300V, UL STYLE 1569,
18 GA SOLID OR TINNED COPPER CONDUCTOR
2. INSULATION COLOR - WHITE
3. PLACED IN A 3.5 IN X 1 IN
POLY BAG WITH LABEL (PART
NUMBER AND BARCODE)

NOT RELEASED

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	FIRST USED ON	-	DW/BART BAXTER	Honeywell	
MAT'L PURCHASED - (SEE AML)	MAT'L SPEC. (1)		DIMENSIONS ARE IN:	THIRD ANGLE PROJECTION	DES.	ENVIRONMENTAL & COMBUSTION CONTROLS	
OR	()		<input checked="" type="checkbox"/> INCHES		BART BAXTER	GOLDEN VALLEY, MN	
FUNCTIONAL DIMENSIONING:			DRAFT CALLOUTS		NEXT ASS'Y	NAME	
ALL DIMENSIONED AND UNDIMENSIONED GEOMETRY AND TOLERANCING ON THIS DRAWING IS DEFINED AND CONTROLLED BY THE DATABASE FILE. KEY INFORMATION IS REPRESENTED BY THIS DRAWING CONTAINING FUNCTIONAL DIMENSIONS.			INDICATES DECREASING DIMENSION		-	C-WIRE	
CONTROLLED BY DATABASE FILE:			INDICATES INCREASING DIMENSION		REFERENCE	DRAWING NO.	
			-TOLERANCE UNLESS NOTED-		-	32327477	
			MACHINED $\pm 5^\circ$		LIFECYCLE STATE	REV.	
			FORMED $\pm 2^\circ$ / -1°			04	
			MILLIMETERS	INCHES	PROJECT NO.	SCALE 2:1	
			OVER INCLUDING		24565	Sheet 1 of 1	
			0 TO 6 ±0.1	.0 ±.02	HONEYWELL CONFIDENTIAL AND PROPRIETARY	SIZE A	
			6 TO 30 ±0.2	.00 ±.01			
			30 TO 100 ±0.3	.000 ±.010			
			100 TO 300 ±0.5				
			300 TO 1000 ±0.8				