

2-Way Outlet Shapes, VG style

• Helashrink 200 Series


Branching parts are employed for mechanical tension relief in cable harnesses. For VG shapes with portholes "P" please refer to product standards tables in the appendix.



203-1-G supplied / fully recovered.



a: Expanded form (supplied)

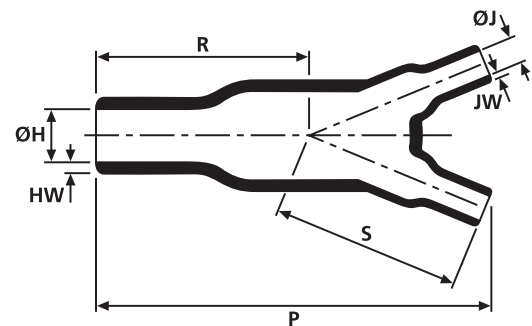

b: Fully recovered form (after heating)

Sizes and Type Table

Type	Designation as per VG-Norm	ØH	ØH	ØJ	ØJ	P	R	HW	JW	S
		min. a	max. b	min. a	max. b	± 10%	± 10%	± 20%	nom	nom
206-1	VG95343T08C001A	13.0	6.0	7.0	3.0	41.0	19.0	1.5	1.0	19.0
213-1	–	17.3	7.9	11.1	7.9	140.0	83.1	2.3	1.0	64.0
213-2	–	40.0	8.5	31.8	7.9	140.0	83.1	2.3	2.3	64.0
212-1	VG95343T08C005A	14.5	8.0	8.5	5.5	136.0	83.0	2.3	2.0	63.0
203-1	VG95343T08C002A	27.0	12.0	13.0	6.0	80.0	43.0	2.5	1.5	43.0
204-1	VG95343T08C003A	39.0	18.0	27.0	12.0	131.0	81.0	3.1	2.0	81.0

All dimensions in mm. Subject to technical changes.

Combinations "On request"

Adhesive	Material				
	B7	G	J	H	L
WM250	√	√	√	√	-
W8	√	√	√	√	-
W24	√	√	√	√	√
V9500	√	√	√	-	-
HMT200A	√	√	√	-	-
W21	-	-	-	√	-
Without Adhesive	√	√	√	√	√

Standard combinations

Article-No.	Type
402-06180	206-1-G
402-13180	213-1-G
402-13021	213-2-G
402-12180	212-1-G
402-03180	203-1-G
402-04180	204-1-G