




**CATALOG NUMBER:** See table below  
**DESCRIPTION:** Hi Visibility-Lo Temp extension cord with enhanced cold temperature flexibility and a power indicator light in the cord connector  
**APPROVALS:** UL Listed and CSA Certified, or UL/CUL Listed, Outdoor Use Cord Set

**CONSTRUCTION PARAMETERS:**

Conductor: SJTW, see table below for gauge  
 Cable jacket material: Low temperature PVC, light blue  
 Cord rating: Hard Usage per the National Electrical Code  
 Cable legend type: Indent print

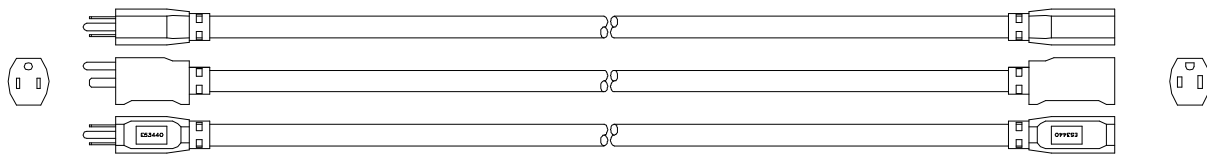

*Note: Plug style may vary*

Attachment plug configuration: NEMA 5-15P  
 Cord connector configuration: NEMA 5-15R  
 Plug and connector material: Clear PVC, with neon power indicator lamp in the connector

**ELECTRICAL AND ENVIRONMENTAL PROPERTIES:**

Cable temperature rating: -50 to +60 °C  
 Nominal operating voltage: 125 VAC  
 Maximum operating current: See table below

Catalog no.	Gauge	Length	Current rating	Case qty	UPC
2367SW8806	16/3	25 ft	13A	12	0 29892 02367 6
2368SW8806		50 ft		12	0 29892 02368 3
2467SW8806	14/3	25 ft	15A	6	0 29892 02467 3
2468SW8806		50 ft		6	0 29892 02468 0
2469SW8806		100 ft		3	0 29892 02469 7
2568SW0006	12/3	50 ft	15A	4	0 29892 02568 7
2569SW0006		100 ft		4	0 29892 02569 4

*This product complies with European Directive 2011/65/EU (RoHS-2),*

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company LLC.