



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/22/2017
Issue: 1

Construction

Description: 3/C 22 19/34 TC XLP/TPE		Diam. (In)
Component:	3 Conductors	
Conductor:	22 AWG 19/34 Tinned Copper to ASTM B-8	0.030"
Insulation:	0.016" XLPE to SAE J-1128	0.062"
Color Code:	Red, White, Black	0.062"
Cable Assembly:	3 Conductors Bunched Cabled	0.133"
Tape:	Non-Woven Separator Tape for Strip-Ability (optional)	0.136"
Jacket:	0.02" TPE (Thermo Plastic Elastomer)	0.176"
Jacket Color:	Black	0.176"
Print:	Not Required	

Specifications: 105 °C VOLTAGE : 30V
 Conductor Resistance : 14.30 Ω per MFT
 Spark Test:AC-500V/0.15sec MIN
 Impedance: 46.61
 Capacitance: 35.17

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ170103



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/22/2017
Issue: 1

Drawing/Rotation:

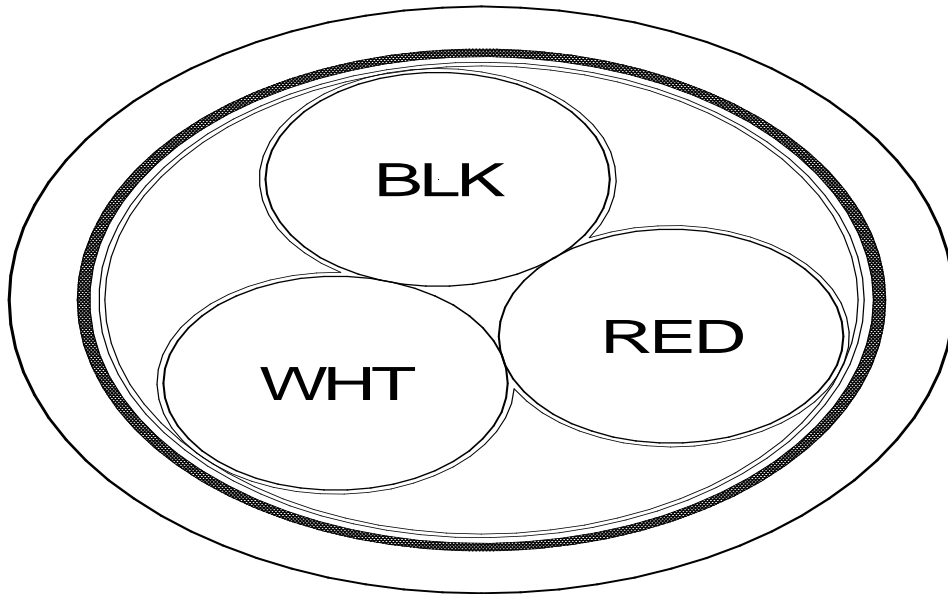

IQ170103