

PRODUCT SPECIFICATION


DATE	REV	ECN	DESCRIPTION
5/8/2017	C	E37675	Complete revision.

Parent Number: FMD029-

Description: 0.5mm2 16/.20mm BC Thin Wall 3TBD ES-AU5T-1A348-AA Ford Global Spec FLR2X-B
DIAMETER: 0.059
TOLERANCE ±: 0.004

Stranding: 16/.20mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 3TBD; GM: GMW15626 CU-R3XLPE; Fiat-Chrysler: MS.90034 CBBT; ISO 6722-1; DIN 76722 FLR2X 0.5-B T125

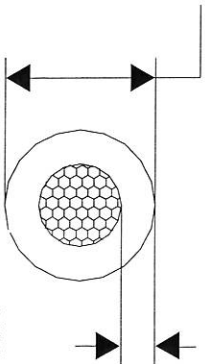

NOM WALL: 0.011
MINIMUM WALL: 0.009

Insulation: XLPE

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: -40C to +125C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): 32838848

Approved By: *[Signature]* **Date:** 5-8-17

Title: *Senior Specialist* **Company Name:** IEC



Copperfield®

1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115