

YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:

Company:

A: 12 AWG 8 Conductors 65 Strands Bare Copper with PVC Insulation  
Overall Polyvinylchloride Jacket

Size & Stranding: 12 AWG 65/30  
Metal Type: Annealed Bare Copper  
Wire Nominal Diameter: 0.093  
Insulation Type: Polyvinylchloride  
Nominal Insulation Thickness: 0.028  
Nominal Conductor Diameter: 0.149  
Color Code: Core: Fillers for Roundness  
Layer 1: Black, White, Red, Green, Brown, Blue, Orange, Yellow

B: Cotton Fillers, as Necessary for Circular Cross-Section

Cable Lay: 6.00 LHL (2.00 tw/ft)

C: Non-Woven Tape Wrap - 100% Coverage

D: Black (Matte Finish) Polyvinylchloride Jacket, Minimum Average Wall Thickness: 0.060  
Pressure Extruded


Legend: I {TOURTRONICS LOGO} - SPK8TG - 8/C 12AWG HD Touring Grade Speaker  
Cable (800) 817-2683 | www.emfgrp.com I

One Foot Between Markers | <----- Legend -----> |

2 Inches From Marker To Start of Legend - 8 Inch Long Legend - 2 Inches To End Marker

Notes:

Print Type: Print Wheel with Silver Ink  
Work Order #: Yes (Opposite side of Legend)  
Footage Markers: Yes  
Ripcord: N/A  
Convolution Level: Level 2 or better  
Weight: 358 Lb/Mft

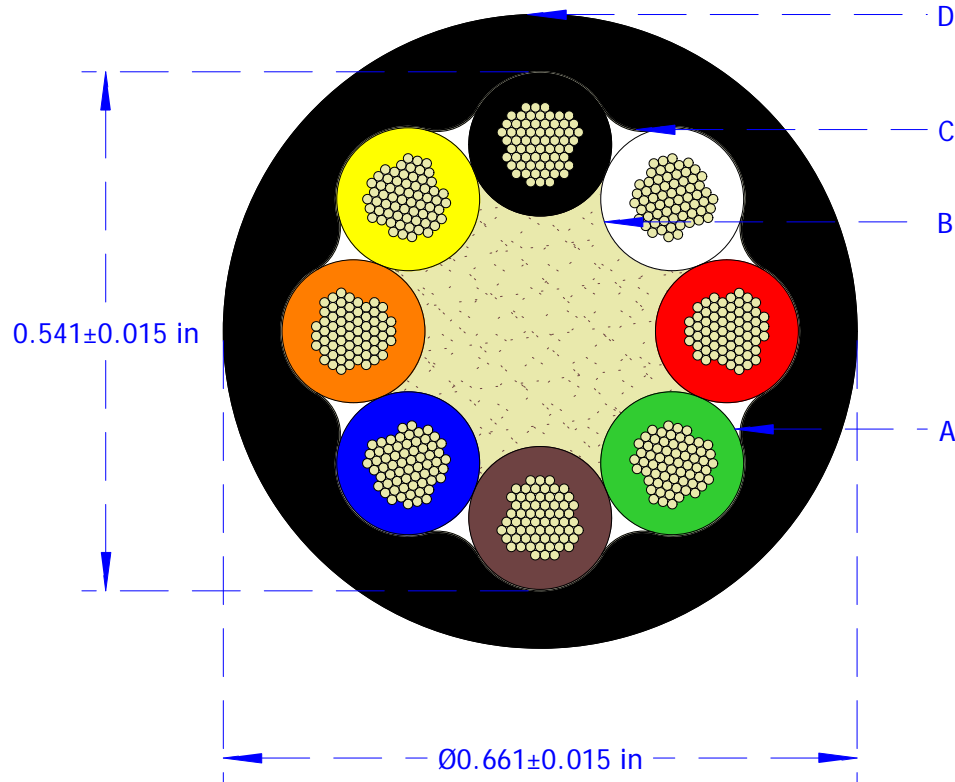

### 12GA 8 Conductor Cable with PVC Jacket

All Dimensions are Shown In Inches

**PROPRIETARY DOCUMENT**

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection

Drawn By: JRV

Scale: 5 : 1

Cust. #: -

REV -

Reviewed By: -

Sheet: 1 of 1

Lake's #: AVB128BC65-00TT

REV A

Cage Code: N/A

Date Created: 08/06/15

Revision

Updated to latest version

Description

JRV

Approved By

03/20/17

Date

