



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/16/2017
Issue: 1

Construction

Description: 3/C 20 19/32 TC PVC/PVC Round and Smooth Mold Grade		Diam. (In)
Component:	3 Conductors	
Conductor:	20 AWG 19/32 Tinned Copper to ASTM B-8	0.04"
Insulation:	0.01" Premium Grade PVC	0.06"
Color Code:	Brown, Blue, Black	0.06"
Cable Assembly:	3 Conductors Bunched Cabled	0.129"
Fillers:	Fibrillated polypropylene or solid fillers for roundness (optional)	0.129"
Tape:	Non-Woven Separator Tape for Strip-Ability (optional)	0.132"
Jacket:	0.038" Premium Grade UL PVC Round and Smooth Level II	0.208"
Jacket Color:	Gray	0.208"

Print: E174416 RU AWM-2517 105C 300V VW1 --- cRU AWM I/II A/B 105C 300V FT-1

Specifications:	AWM Style	Temp	Voltage	Flame	
UL	AWM-2517	105°C	300	VW-1	
Canadian cRU	AWM	105°C	300	FT-1	I/II A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ170102



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 3/16/2017
Issue: 1

Drawing/Rotation:

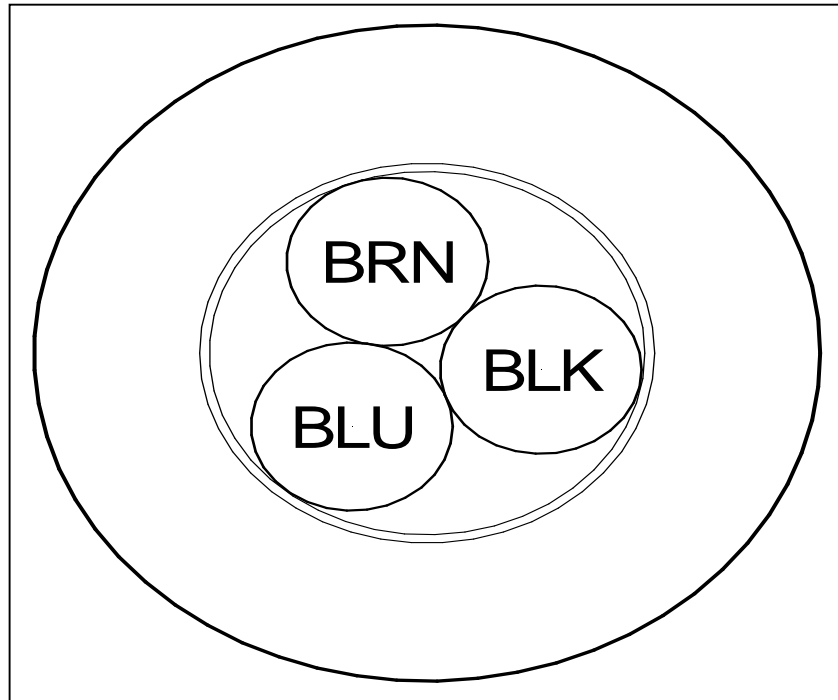

Sunlight Resistant
Bend Radius = 5X Static, 10X Flex
Oil Resistant I & II

IQ170102