


TPE GROUNDING CABLE

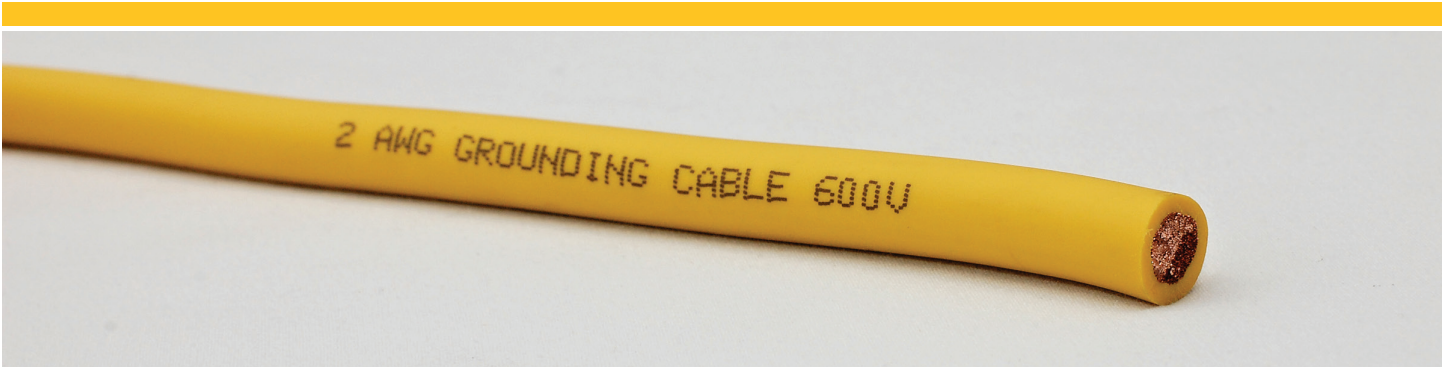

FEATURES

- Insulation meets the operating temperature range of ASTM F-855, Type I.
- Excellent operating temperature range from -40°C to 90°C.
- Superior flexibility in cold weather.
- Oil resistant to UL 1581
- Special stranding and packaging are available upon request.
- Custom print available upon request.

APPLICATIONS

- Temporary grounding for de-energized overhead electrical lines and de-energized electrical equipment.

CONSTRUCTION

Highly flexible stranded No. 30 bare copper conductor insulated with a high grade RoHS compliant 90°C TPE.

TPE GROUNDING CABLE



GAUGE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE	SHIPPING WEIGHT -LBS/ 1000 FT.
		in	mm	in	mm		
2	7/95/.010	0.090	2.29	0.493	12.52	500 or 1000	271
1/0	19/56/.010	0.090	2.29	0.576	14.63	500 or 1000	394
2/0	19/70/.010	0.100	2.54	0.646	16.41	500 or 1000	516
3/0	19/88/.010	0.100	2.54	0.700	17.78	500 or 1000	648
4/0	19/111/.010	0.100	2.54	0.770	19.56	500 or 1000	784

Please contact your Kalas representative to discuss ampacity and voltage drop values based on NEC standards.

KALAS HEADQUARTERS
 167 Greenfield Road
 Lancaster, PA 17601

KALAS LOS ANGELES
 28365 Constellation Road, Unit B
 Valencia, CA 91355

KALASWIRE.COM
 P 717.336.5575
 F 717.945.1002