


# TPE GROUNDING CABLE

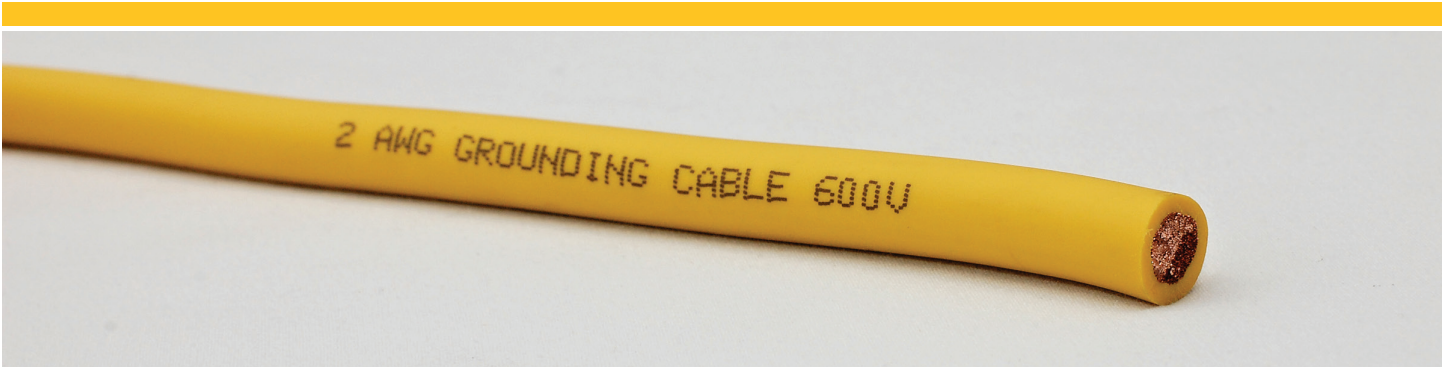

## FEATURES

- Insulation meets the operating temperature range of ASTM F-855, Type I.
- Excellent operating temperature range from -40°C to 90°C.
- Superior flexibility in cold weather.
- Oil resistant to UL 1581
- Special stranding and packaging are available upon request.
- Custom print available upon request.

## APPLICATIONS

- Temporary grounding for de-energized overhead electrical lines and de-energized electrical equipment.

## CONSTRUCTION

Highly flexible stranded No. 30 bare copper conductor insulated with a high grade RoHS compliant 90°C TPE.

# TPE GROUNDING CABLE



GAUGE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE	SHIPPING WEIGHT -LBS/ 1000 FT.
		in	mm	in	mm		
2	7/95/.010	0.090	2.29	0.493	12.52	500 or 1000	271
1/0	19/56/.010	0.090	2.29	0.576	14.63	500 or 1000	394
2/0	19/70/.010	0.100	2.54	0.646	16.41	500 or 1000	516
3/0	19/88/.010	0.100	2.54	0.700	17.78	500 or 1000	648
4/0	19/111/.010	0.100	2.54	0.770	19.56	500 or 1000	784

Please contact your Kalas representative to discuss ampacity and voltage drop values based on NEC standards.

**KALAS HEADQUARTERS**  
 167 Greenfield Road  
 Lancaster, PA 17601

**KALAS LOS ANGELES**  
 28365 Constellation Road, Unit B  
 Valencia, CA 91355

**KALASWIRE.COM**  
 P 717.336.5575  
 F 717.945.1002