



Hueson Wire
 38 Suton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com


Issue Date: 4/5/2017
Issue: 1

Construction

Description:	2/C 14 41/30 TC PVC/PVC AWM-2464	Diam. (In)
Component:	2 Conductors	
Conductor:	14 AWG 41/30 Tinned Copper to ASTM B-174	0.075"
Insulation:	0.012" Premium Grade PVC	0.099"
Color Code:	Black + Red	0.099"
Cable Assembly:	2 Conductors Bunched Cabled Talc for strip-ability	0.168"
Jacket:	0.05" Premium Grade UL PVC UL QMTT2 720 Hour UV- Resitant	0.268"
Jacket Color:	Black	0.268"

Print: E174416 RU 14 AWG AWM-2464 80°C 300V VW-1 - - - cRU AWM I/II AB 80C 300V FT-1

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-2464	80°C	300	VW-1
Canadian cRU	AWM	80°C	300	FT-1 I/II A/B

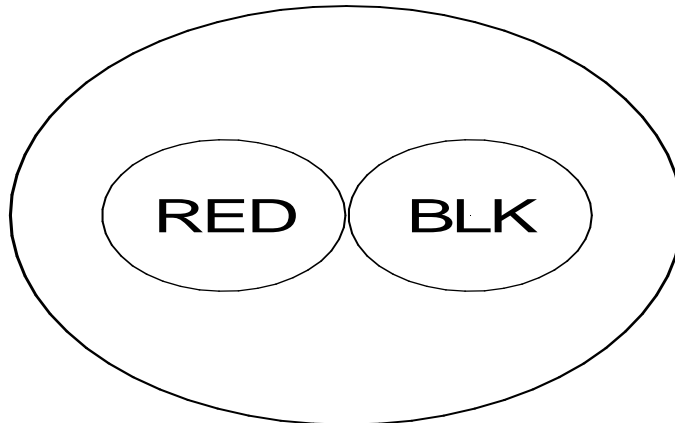

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65: