


3x20 AWG ITC/PLTC AWM 2517 105C 300V

SPECIFICATIONS

A	20 AWG 19x.0073" UNILAY TINNED COPPER
B	PVC INSULATION
C	TISSUE PAPER SEPARATOR
D	PVC JACKET JACKET COLOR: GRAY CABLE IS RoHS COMPLIANT

CONDUCTOR COLORS

- 1 = BROWN
- 2 = BLUE
- 3 = BLACK

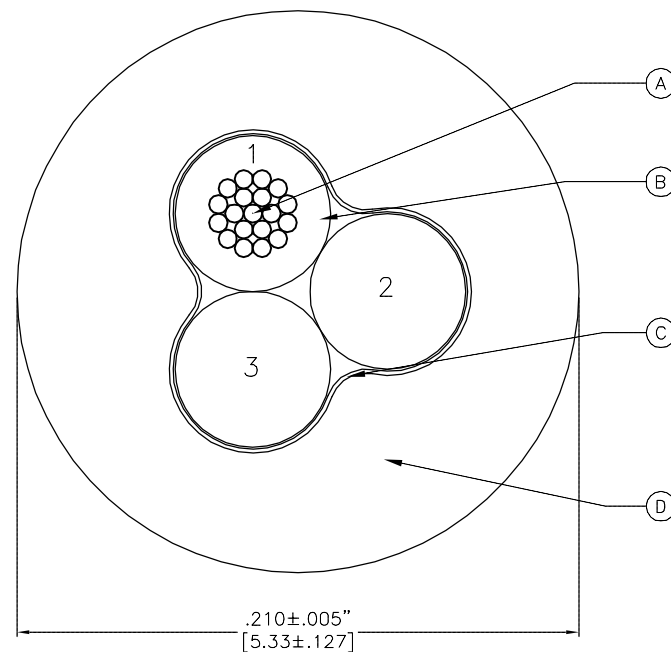

ELECTRICAL REQUIREMENTS

DIELECTRIC WITHSTAND VOLTAGE: 1.5 KVAC

MECHANICAL REQUIREMENTS

STATIC: 5x CABLE O.D.

FLEX: 10x CABLE O.D.

NOTES:

1. BLACK INK

101550528 20 AWG/3 (UL) ITC 105C UL# SUNLIGHT RESISTANT OR PLTC 105C -40C OIL RES I & II OR AWM 105C 300V OR CSA CMX-OUTDOOR-CMG CSA# 105C OR CSA AWM I/II A/B 105C 300V FT4 MSHA# SUPPLIER LOT CODE (WHEN APPLICABLE) MFG DATE CODE (EXAMPLE 00108 (DAY & YEAR))

NOTE: CONDUCTOR ROTATION MAY BE INVERTED FROM VIEW SHOWN **SOURCE DRAWING - FOR REFERENCE ONLY**

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			DRFT	CK	DATE	08/26/11
2.			APVD	SF	SCALE	NONE
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION	
4.			INCH [MILLIMETER]		CAB,5.33,GRY,PVC,3X20,105C,300V,ITC,MSHA	
MATERIAL		CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS			101550528 (SOURCE)		C	
FINISH		DO NOT SCALE THIS DRAWING		FILE: 101550528		SHEET 1 OF 1
SEE SPECIFICATIONS						

C	UPDATE APPROVAL NOTE	NF	01/15/15	48637
REV	DESCRIPTION	BY	DATE	ECO NO.