

YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:

Company:

A: 12 AWG 4 Conductors 65 Strands Bare Copper with PVC Insulation Overall Polyvinylchloride Jacket


Size & Stranding: 12 AWG 65X30
 Metal Type: Annealed Bare Copper
 Wire Nominal Diameter: 0.093
 Insulation Type: Polyvinylchloride
 Nominal Insulation Thickness: 0.028
 Nominal Conductor Diameter: 0.149
 Color Code: Black, White, Red, Green

B: Cotton Fillers, as Necessary for Circular Cross-Section

Cable Lay: 5.50 LHL (2.18 tw/ft)

C: Non-Woven Tape Wrap - 100% Coverage

D: Black (Matte Finish) Polyvinylchloride Jacket, Minimum Average Wall Thickness: 0.045 Pressure Extruded


Legend: |  - SPK4 - 4/C 12 AWG HD Touring Grade Speaker Cable
 (800) 817-2683 | www.emfgrp.com |

One Foot Between Markers | <----- Legend -----> |

2 Inches From Marker To Start of Legend - 8 Inch Long Legend - 2 Inches To End Marker

Notes:

Print Type: Print Wheel with Silver Ink
 Work Order #: Yes (Opposite side of Legend)
 Footage Markers: Yes
 Ripcord: N/A
 Convolution Level: Level 2 or better
 Weight: 162 Lb/Mft

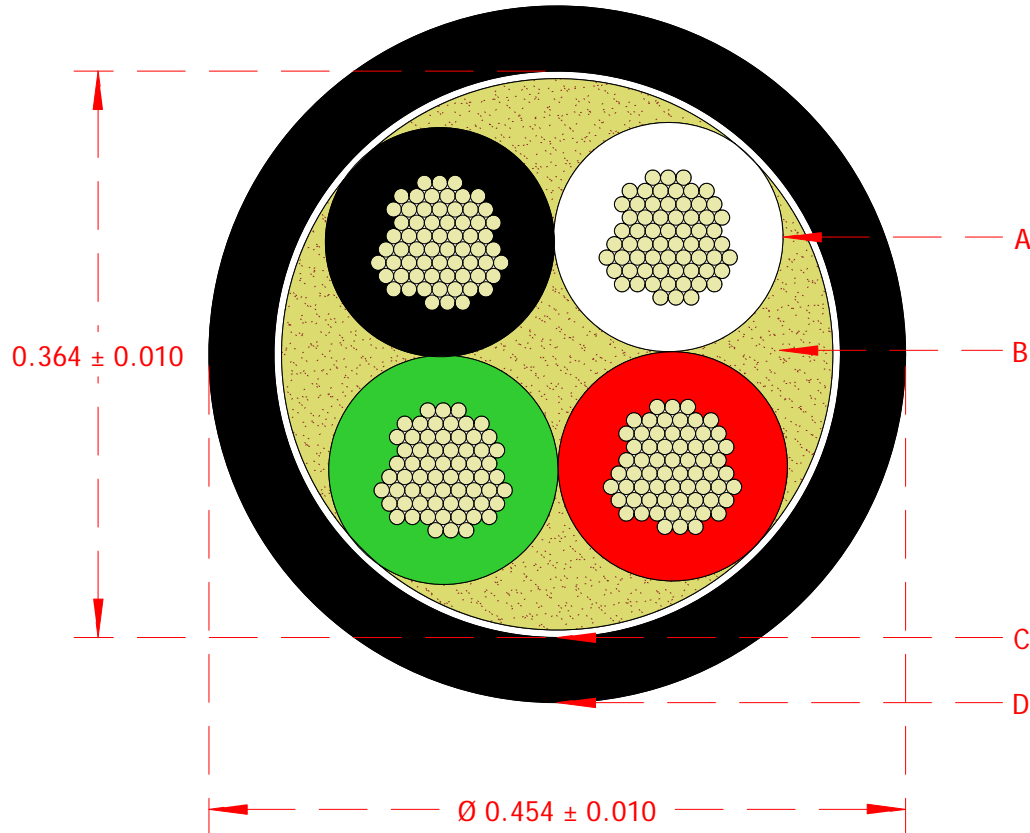

12GA 4 Conductor Cable with PVC Jacket

All Dimensions are Shown In Inches

PROPRIETARY DOCUMENT

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection 

Drawn By: RIR

Scale: 8 : 1

Cust. #: -

REV

-

Reviewed By: -

Sheet: 1 of 1

Lake's #: AV124BC65-00TT

REV

-

Cage Code: N/A

Date Created: 05/19/17

Revision

Description

Approved By

Date

