



CUSTOMER: P/N: 14/3.SJTBNH REV. APPROVED BY:

REVISIONS		
REV.	DESCRIPTION	DATE
△A		05.05.26
△B		05.09.08
△C		07.06.15
△D		10.10.09
△E		2011.09.05
△F		2013/12/14

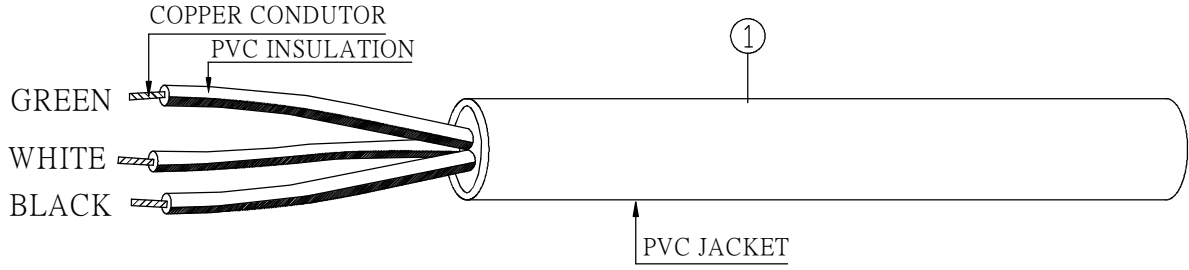

- NOTES:
- The net cord.
 - △ Braille printing.
 - PE
 - 250 FT.
 - CSA
 - RoHS
 - △ no connection point

	ITEMS	RESULTS	REMARKS
CONDUCTOR	NO OF STRAND	41	SOFT COPPER
	DIAM OF EACH CONDUCTOR	0.254MM	
	DIAM OF STRAND CONDUCTOR	1.88MM	
	CORSS SECTION AREA	2.077MM ²	
INSULATION	MINIMUM AVERAGE THICKNESS	0.76MM	PVC
	MINIMUM THICKNESS AT ANY POINT	0.69MM	
	INSULATION DIAMETER	3.4MM±0.15MM	COLOR: BLACK, WHITE, GREEN
JACKET	MINIMUM AVERAGE THICKNESS	0.76MM	PVC
	MINIMUM THICKNESS AT ANY POINT	0.69MM	
	OVER ALL DIAMETER	9.3MM±0.2MM	
	COLOR	BLACK	
SURFACE MARKING: (UL) SJTW E90165 105°C VW-1 300V 3x2.08mm ² (14AWG) WELL SHIN CSA TYPE SJTW 105°C 3x2.08mm ² (14AWG) FT2 300V LL57855			

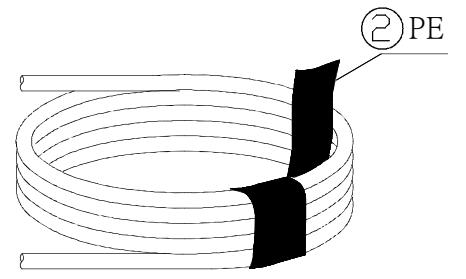

250FT/REEL

MARKING: ⊕ FOR DONG-GUAN PLANT, ⊕ FOR KUN-SHAN PLANT			
SIGNATURE		QUAIL ELECTRONICS, INC. http://www.quail.com	
SAFETY ENGINEER:		PRODUCT NO.: SJTW 14AWG 3C 105°C	DATE: 2013/12/14
MANAGER BY:		UNIT: mm	SHEET: 1 OF 1
CHECKED BY:		DWG NO: 0096-0338	
DRAWN BY:		REV. F	

ITEM	DESCRIPTION	COLOR	QTY
②	PE	CLEAR	1
①	SJTW 14AWG 3C 105°C APPROVAL:UL,C-UL(CSA)	BLACK	1