





# Heyco® Snap Bushings

Mounting Hole Diameter Range: .250" (6,4 mm) to .875" (22,2 mm)

- Convert raw-edged holes to smooth, neat, insulated holes.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250" (6,4 mm) to 6.00" (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:  
Part No. 2012, SB 312-3 Brass  
Part No. 2033, SB 375-4 Brass  
Part No. 2041, SB 437-4 Brass

| MOUNTING HOLE DIAMETER  |      | PART NO. |       | DESCRIPTION | PART DIMENSIONS   |      |                 |      |                  |      |
|---|------|----------|-------|-------------|-------------------|------|-----------------|------|------------------|------|
| in.   | mm.  | Black    | White |             | A Inside Diameter |      | B Head Diameter |      | C Overall Height |      |
|   |      |          |       |             | in.               | mm.  | in.             | mm.  | in.              | mm.  |
| Single Locking Step for Panel Thickness up to .040" (1,0 mm)    |      |          |       |             |                   |      |                 |      |                  |      |
| .250  | 6,4  | 2003     | 2004  | SB 250-040  | .13               | 3,2  | .31             | 7,9  | .31              | 7,9  |
| Single Locking Step for Panel Thickness up to .062" (1,6 mm)    |      |          |       |             |                   |      |                 |      |                  |      |
| .250  | 6,4  | 2000     | 2001  | SB 250-2    | .14               | 3,6  | .31             | 7,9  | .31              | 7,9  |
| .312  | 7,9  | 2010     | 2011  | SB 312-3    | .19               | 4,8  | .38             | 9,5  | .31              | 7,9  |
| Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm) |      |          |       |             |                   |      |                 |      |                  |      |
| .375  | 9,5  | 2020     | 2021  | SB 375-3    | .19               | 4,8  | .47             | 11,9 | .41              | 10,3 |
|   |      | 2030     | 2031  | SB 375-4    | .25               | 6,4  |                 |      |                  |      |
| .437  | 11,1 | 2042     | 2037  | SB 437-243  | .24               | 6,2  | .53             | 13,5 |                  |      |
|   |      | 2038     | 2039  | SB 437-4    | .27               | 6,8  |                 |      |                  |      |
|   |      | 2043     | 2044  | SB 437-5    | .31               | 7,9  |                 |      |                  |      |
| .500  | 12,7 | 2058     | 2059  | SB 500-4    | .25               | 6,4  | .57             | 14,5 |                  |      |
|   |      | 2049     | 2050  | SB 500-5    | .31               | 7,9  |                 |      |                  |      |
|   |      | 2053     | 2054  | SB 500-6    | .39               | 9,9  |                 |      |                  |      |
| .562  | 14,3 | 2060     | 2061  | SB 562-5    | .31               | 7,9  | .66             | 16,7 |                  |      |
|   |      | 2063     | 2064  | SB 562-6    | .39               | 9,9  |                 |      |                  |      |
|   |      | 2066     | 2067  | SB 562-7    | .44               | 11,1 |                 |      |                  |      |
| .625  | 15,9 | 2075     | 2078  | SB 625-4    | .25               | 6,4  | .72             | 18,2 |                  |      |
|   |      | 2070     | 2071  | SB 625-7    | .44               | 11,1 |                 |      |                  |      |
|   |      | 2073     | 2074  | SB 625-8    | .50               | 12,7 |                 |      |                  |      |
| .687  | 17,4 | 2083     | 2084  | SB 687-8    | .50               | 12,7 | .78             | 19,8 |                  |      |
|   |      | 2086     | 2087  | SB 687-9    | .56               | 14,3 |                 |      |                  |      |
| .750  | 19,1 | 2090     | 2091  | SB 750-6    | .39               | 9,9  | .85             | 21,6 |                  |      |
|   |      | 2092     | 2099  | SB 750-8    | .50               | 12,7 |                 |      |                  |      |
|   |      | 2093     | 2094  | SB 750-9    | .56               | 14,3 |                 |      |                  |      |
|   |      | 2096     | 2097  | SB 750-10   | .61               | 15,5 |                 |      |                  |      |
| .812  | 20,6 | 2100     | 2101  | SB 812-9    | .56               | 14,3 | .89             | 22,6 |                  |      |
|   |      | 2103     | 2104  | SB 812-10   | .63               | 15,9 |                 |      |                  |      |
| .875  | 22,2 | 2110     | 2111  | SB 875-6    | .38               | 9,5  | .95             | 24,2 | .45              | 11,5 |
|   |      | 2113     | 2114  | SB 875-7    | .44               | 11,1 |                 |      |                  |      |
|   |      | 2116     | 2117  | SB 875-8    | .50               | 12,7 |                 |      |                  |      |
|   |      | 2120     | 2121  | SB 875-9    | .56               | 14,3 |                 |      |                  |      |
|   |      | 2123     | 2124  | SB 875-10   | .63               | 15,9 |                 |      |                  |      |
|   |      | 2126     | 2127  | SB 875-11   | .69               | 17,5 |                 |      |                  |      |

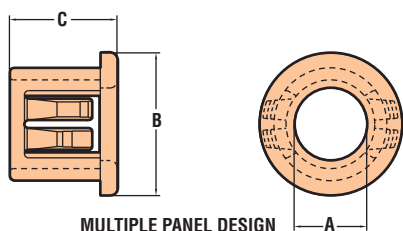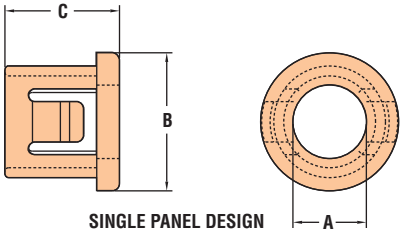

Standard colors black and white. Consult Heyco for other colors.

Quick Specs

|                     |   |
|---------------------|---|
| Material            | Nylon 6/6   |
| Certifications      | Recognized under the Component Program of Underwriters' Laboratories, File E15331<br>Certified by Canadian Standards Association, File 8919 |
| Flammability Rating | 94V-2   |
| Temperature Range   | -4°F (-18°C) to 221°F (105°C)   |