


REV.	DESCRIPTION	DATE
0	Initial release.	3/25/2016

General Properties 12.0mm² 154/.32mm Bare Copper HVFX Thick Wall High Voltage Cable

Application Hybrid or Electric powered Vehicles

General Composition of Cable See Below

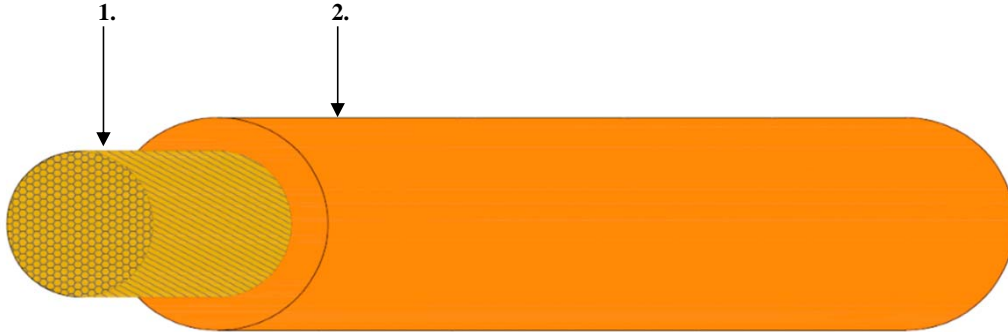

Color Code
Inner ORG

Physical Data

Description	Dimensions (Nom.)	
	inches	mm
1. Conductor:	0.192	4.88
2. Insulation:	0.276	7.01
	OD Tolerance	+/- 0.012" +/- 0.3mm
Print Legend:	CHAMPLAIN CABLE 12.0mm ² BC HVFX HIGH VOLTAGE CABLE 15342 XXXXX (xxxxx-lot code)	


Electrical Data

Conductor Resistance: 0.463 ohms/kft 1.52 ohms/km @ 20° C nominal
Voltage Rating: 1000 volts maximum per J1654

General Data

Use: High Voltage Power Cables for Electric or Hybrid Vehicles
Temperature Range: -55° C to +150° C
Primary Insulation: Meets Requirements of ISO 6722 Thick Wall, Class D
Weight: 75 lbs/mft

Min. Static Bend Radius: inches mm
1.1 28

 175 HERCULES DRIVE COLCHESTER, VT 05446 802-654-4200	TITLE	
	12.0mm ² 154/.46mm Bare Copper HVFX Thick Wall High Voltage Cable	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES	DRN. Michael Cienkus	DATE 3/25/2016
	CKD. Nathan Bacon	DATE 3/28/2016
DO NOT SCALE THIS DRAWING	SIZE A	PART NUMBER TBD
		DOCUMENT NUMBER 15342
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.		PAGE 1 of 1