

156920/7 TAC

UL-1569 20 7/28 Tinned Copper Waterblocked



Conductor: 20 7/28 Tinned Copper to ASTM B-33-74
Blocked with Anti-capillary agent
.038" Nominal O.D.

Insulation: .016" Premium Grade PVC Insulation
.070" Nominal O.D.

Technical: UV Resistant
-40°C to +105°C

Print: E174416 uR AWM 1569 105°C 300V or AWM 1007 80°C VW-1
20AWG LL109360 CSA TR-64 90°C FT-1

REVISIONS				
LINE	REV	DESCRIPTION	DATE	APPROVED

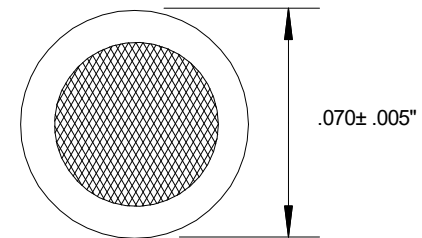

Hueson Corporation

Product Specification

Drawn By: Brian Hanlon	Product Description 20 AWG 7/28 Tinned Copper PVC Anti-Cap	REV 1
Date: Feb 27, 2017	Drawing No. PVC20/7TAC	