

16/9 Type SOOW, Black



RG Wire & Cable Ltd
 67 Cavendish Way
 Glenrothes KY6 2SB
 Scotland
 Tel: +44 1592 775800
 Fax: +44 1592 775822

Part NO: 6260
Product Code: RGW-SO16UL

Product Description

Application:

Machine tools, power tools, portable machinery, submersible pumps, motor leads

Reference Standards Fulfilled

UL flexible cord, UL Subject 62; CSA Flexible Cord, C22.2-49; MSHA approved, RoHS Compliant

Cable Construction

Conductor	Bare Copper, stranded
Construction(strand count/AWG size)	26/30
Standard Dia.(in)	0.059
Insulation	EPDM
Average Thickness (in)	0.030
Insulation Dia.(in)	0.125 (+/- 0.005)
Colors: Black, White, Red, and Green	
Fillers (as needed)	Cotton
Separator	Talc powder
Jacket	CPE
Thickness(in)	0.080 (nom)
Overall Outer Diameter (in)	0.605 (+/- 0.035)
Jacket Color	Black

Marking (Twice Per Meter)

RG WIRE & CABLE #6260 E486041 16 AWG 9/C SOOW (UL) 600V
 (-40 - 90c)--CSA LL268042 FT-2 WATER RESISTANT
 P-07KA140001-MSHA--RoHS xxxx FT

PACKAGING


Wooden Drum, long lengths

Weight (lbs./1000') 250

RoHS GUIDELINE			
We operate according to the following standards			
Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	/
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	/

Revision History

Design

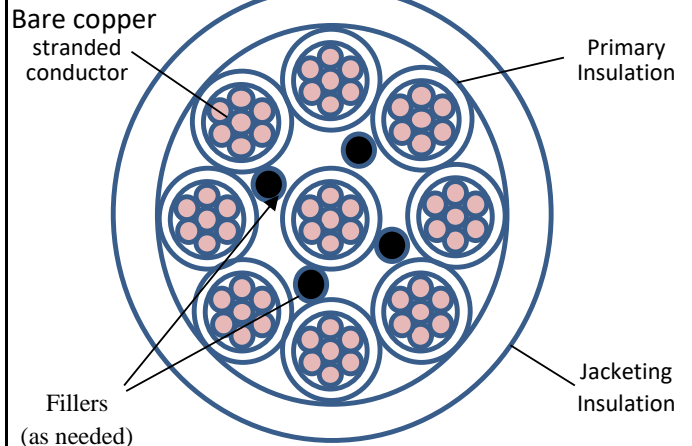

Temperature rating	-40C/+90C
Operating voltage rating	600v
Oil resistant primary insulation	
Oil resistant outer jacket insulation	

Drawn by; MJH	Date: July 13, 2017
	Page: 1 of 1