

Number of Shielded Pairs: 10

AWG/Strand: 20 awg (10/30) TPC .036" Nom.

Primary Insulation: .010" Nominal Wall HDPE

Primary O.D.: .056" +/- .002"

Individual Drain Wires: 20 awg (10/30) TPC

Individual Shields: Foil Free Edge Aluminum/Polyester (Foil In)

Twinned" 1.5" Left Hand Lay

Color Code: Pair 1 Brown-Black + Drain Pair 2 Red-Black + Drain

 Pair 3 Orange-Black + Drain Pair 4 Yellow-Black + Drain

 Pair 5 Green-Black + Drain Pair 6 Blue-Black + Drain

 Pair 7 Violet-Black + Drain Pair 8 Grey-Black + Drain

 Pair 9 White-Black + Drain Pair 10 Pink-Black + Drain

Cabled:: 6.5" Left Hand Lay

Fillers: Fibulated Polypropylene

Drain Wire: 20 awg (10/30) TPC

Overall Shield: Aluminum/Polyester (Foil In)

Separator: Tissue Paper

Jacket: .045" Nominal Wall Glossy Polyurethane

 Pressure Extruded for Roundness

Jacket Color: Black


Finished O.D.: .560" +/- .010"

Jacket Printed: P10P-20GBKGLOSS 300 V CE.... ROHS

 WWW.MROELECTRONICS.COM

Print: White Ink

Revisions				
Rev.	Description	Date	Edit By	

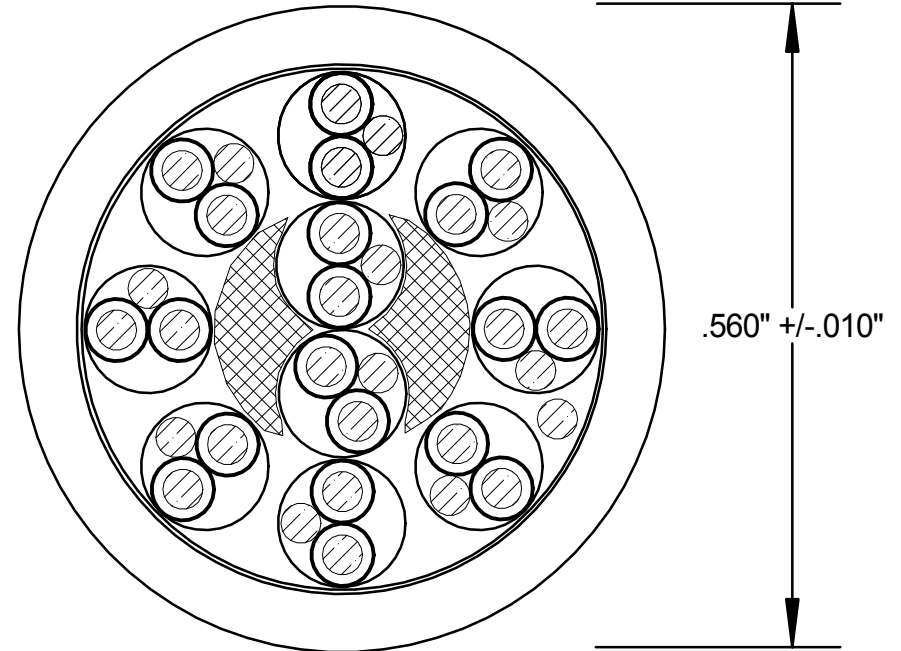

Drawing #:	Rev.
C5788 - 32045591	A

