





This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).  
 Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 20/4 CABLE 125C 300V	UNITS: IN	SCALE: 12:1	ITEM SPECIFICATIONS
CUSTOMER: IEWC	DWG NO: 67762-1		A. 20 GAUGE 19x.008BC BUNCHED
CUSTOMER P/N: 32046370	DATE: 8/4/2017	REV: A	B. 11 MIL FOAMED XLPE INSULATION 125C 300V 9 MIL MIN. FOAMED XLPE INSULATION O.D. .065 ± .003

CORE DIMENSIONS FOR INTERNAL USE ONLY

- C. CLEAR MYLAR WRAP  
20% MIN. OVERLAP 100% COVERAGE
- D. STRING FILLER FOR NWI PROCESSING
- E. 40 MIL TUBED TPE JACKET 125C 300V  
34 MIL MIN. TPE JACKET BLACK JACKET  
NO AGENCY APPROVALS

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU

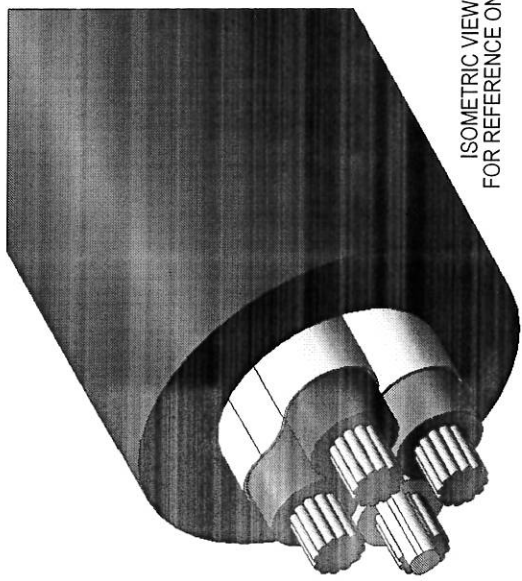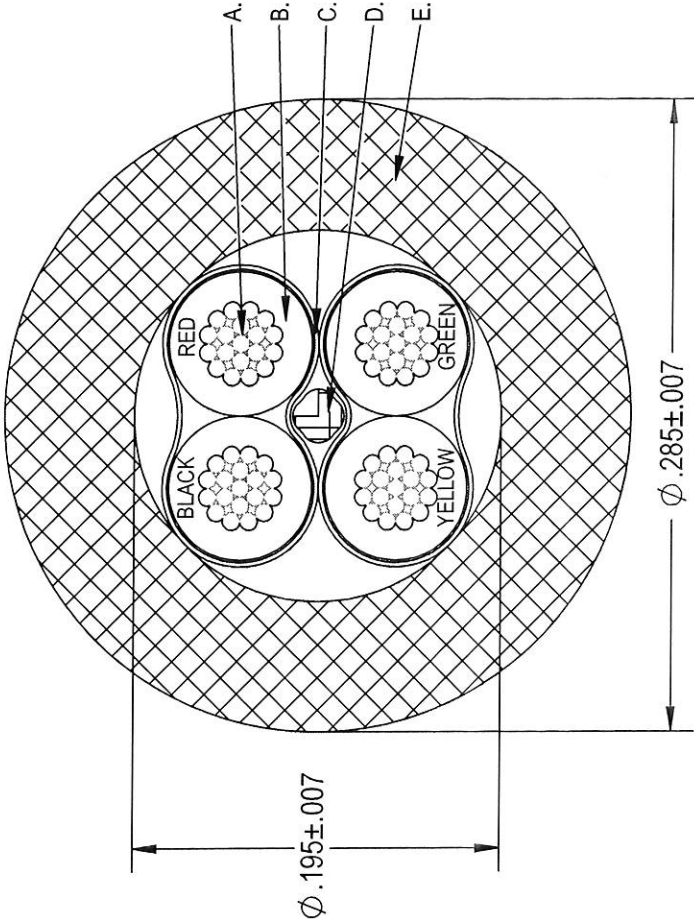

ISOMETRIC VIEW FOR REFERENCE ONLY

COMMON AXIS CABLING OPERATION  
 COLOR ROTATION MAY VARY


LEGEND SPECIFICATIONS NO LEGEND ON CABLE



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).  
 Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION:	UNITS: IN	SCALE: 60:1	ELECTRICAL REQUIREMENTS
CUSTOMER: IEWC	DWG NO: 67762-1		
CUSTOMER P/N: 32046370	DATE: 8/4/2017	REV: A	IMPEDANCE: 120±15 Ohms CAPACITANCE: 38.4 pF/meter NOMINAL

MECHANICAL REQUIREMENTS	NONE SPECIFIED
-------------------------	----------------

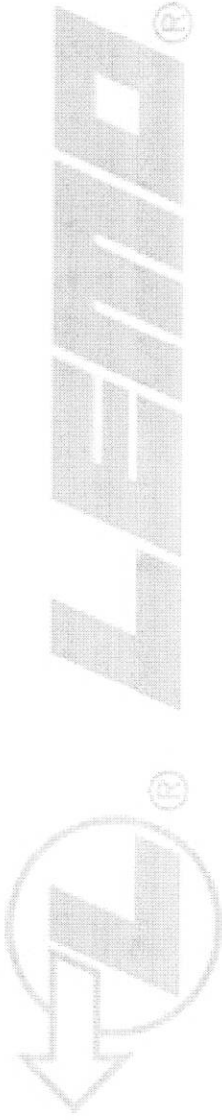

*Large handwritten signature*

INITIAL RELEASE	A	8/4/17	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			