


NOTICE TO ALL PERSONS RECEIVING THIS DRAWING

THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND NEITHER RECEIPT NOR POSSESSION THEREOF CONFERS OR TRANSFERS ANY RIGHT IN, OR LICENSE TO USE THE SUBJECT MATTER OF THE DRAWING OR ANY DESIGN OR TECHNICAL INFORMATION SHOWN THEREON NOR ANY RIGHT TO REPRODUCE THIS DRAWING OR ANY PART THEREOF EXCEPT FOR MANUFACTURE BY VENDORS FOR HARCO LABORATORIES INC AND FOR MANUFACTURE UNDER THE CORPORATION'S WRITTEN LICENSE. NO RIGHT TO REPRODUCE THIS DRAWING IS GRANTED UNLESS BY WRITTEN AGREEMENT WITH OR WRITTEN PERMISSION FROM HARCO LABORATORIES INC

ECP	ECR	REL DATE	REV. LET.	REVISION	REV. BY	CHK BY	APPROVED BY		
							ENG	M.E.	QA
		8-15-08	-	DCRA 29095-000-, INITIAL RELEASE	RFP	RFP	RCG	MCJ	JSP

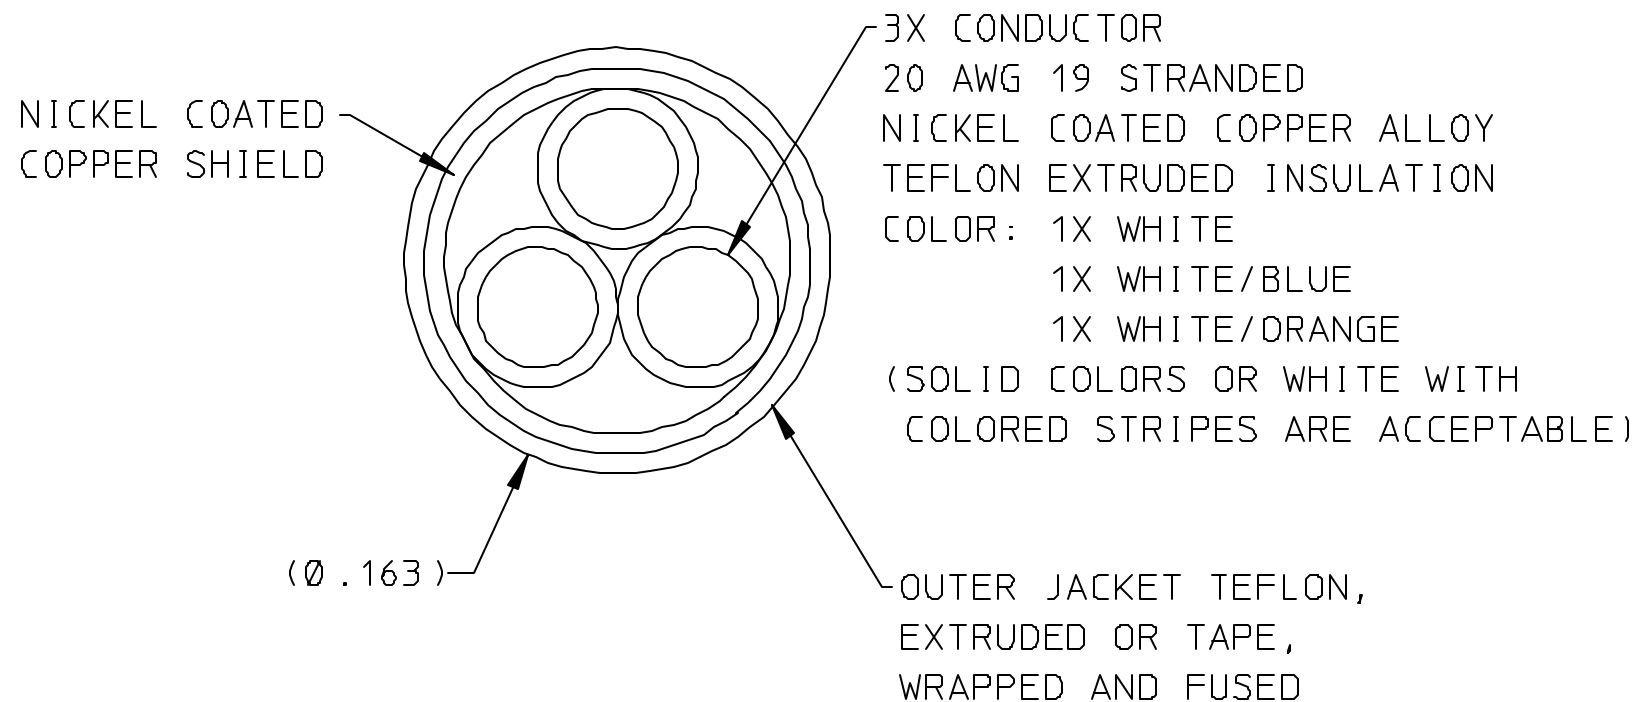

NOTES:

- CABLE TO MEET THE REQUIREMENTS OF M27500-20TN3N06 FOR:
 - A. CONDUCTOR CONSTRUCTION.
 - B. CABLE JACKET INSULATION.
 - C. SHIELD APPLICATION.
 - D. ELECTRICAL REQUIREMENTS.
- MARKER TAPE IDENTIFICATION IS NOT REQUIRED IN THIS CABLE.
- CABLES SHALL BE SPOOLED ON PLASTIC REELS WITH INCREMENTAL LENGTHS NOT SHORTER THAN 250 FEET.
- TEMPERATURE RATING: -55°C TO 260°
- VOLTAGE RATING: 600V

29095-000
PART NUMBER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ±.010 FRACTIONS ±1/32 ANGLES ±2° ALL DIAMETERS $\text{Ⓢ} \pm 0.010$ BREAK EDGES .005-.020 FILLET TO BE .005-.020 SURFACE FINISH 125/√	APPROVALS		DATE	Laboratories, Inc. BRANFORD, CT 06405-0010
	DRAWN	RFP	7-30-08	
	CHECKED	RFP	7-30-08	TITLE CABLE, ELECTRICAL, M27500-20TN3N06
	ENGR	-		SIZE B
	DE	RCG	7-30-08	CAGE CODE 00060
	M.E.	MCJ	7-30-08	DRAWING NO. 29095-000
	QA	JSP	8-12-08	REV. -
MATERIAL SPEC	FINISH SPEC		PREPARED UNDER CONTRACT	SCALE NONE
			FURNISHED UNDER CONTRACT	SHEET 1 OF 1