



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 8/16/2017
Issue: 1

Construction

Description: 24/C 24 (19) mPPE/mPPE		Diam. (In)
Component:	24 Conductors	
Conductor:	24 AWG 19/36 Tinned Copper to ASTM B-8	0.024"
Insulation:	0.007" mPPE UL Approved	0.038"
Color Code:	See Below	0.038"
Cable Assembly:	24 Conductors Cabled	0.228"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.228"
Separator:	Non Woven Separator Tape	0.231"
Jacket:	0.03" mPPE Polyphenylene	0.291"
Jacket Color:	Black	0.291"

Print: E174416 RU AWM 21460 80C 300V VW-1 --- C(RU) AWM I A/B FT1 80C 300V CE

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>		
UL	AWM-21460	80°C	300	VW-1		
Canadian cRU	AWM	80°C	300	FT-1	I/II	A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ170375



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
 bhanlon@huesonwire.com

Issue Date: 8/16/2017
 Issue: 1

Drawing/Rotation:

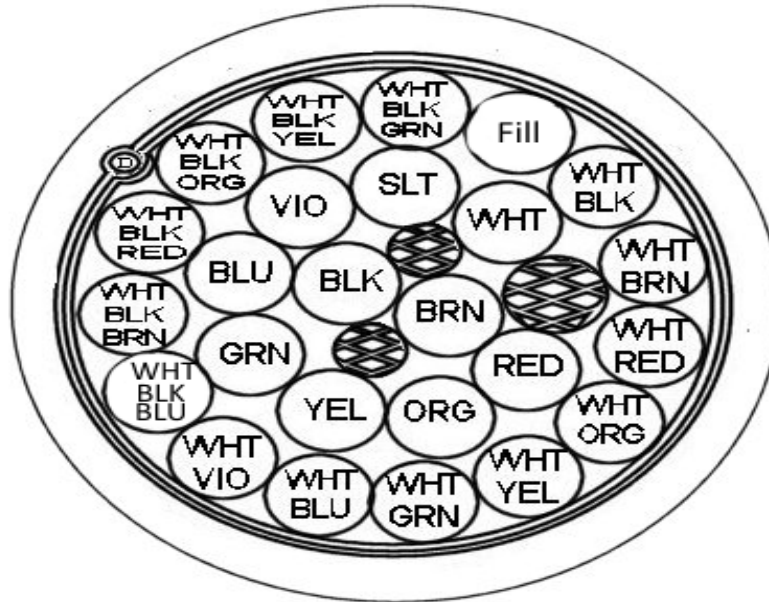

Cond	Color	Cond	Color	Cond	Color
1	Black	10	White	19	White/Black/Blue
2	Brown	11	White/Black	20	White/Black/Brown
3	Red	12	White/Brown	21	White/Black/Red
4	Orange	13	White/Red	22	White/Black/Orange
5	Yellow	14	White/Orange	23	White/Black/Yellow
6	Green	15	White/Yellow	24	White/Black/Green
7	Blue	16	White/Green		
8	Violet	17	White/Blue		
9	Slate	18	White/Violet		