


S24992-12

ENGINEERING CONTROLLED
MANUFACTURER: Yes

CHANGE DETAIL: REVISED SKIN LENGTH

ITEM	DESCRIPTION	QTY
1	INSULATED RING TERMINAL FOR 1/4" STUD	3
2	INSULATED RING TERMINAL FOR #10 STUD	1

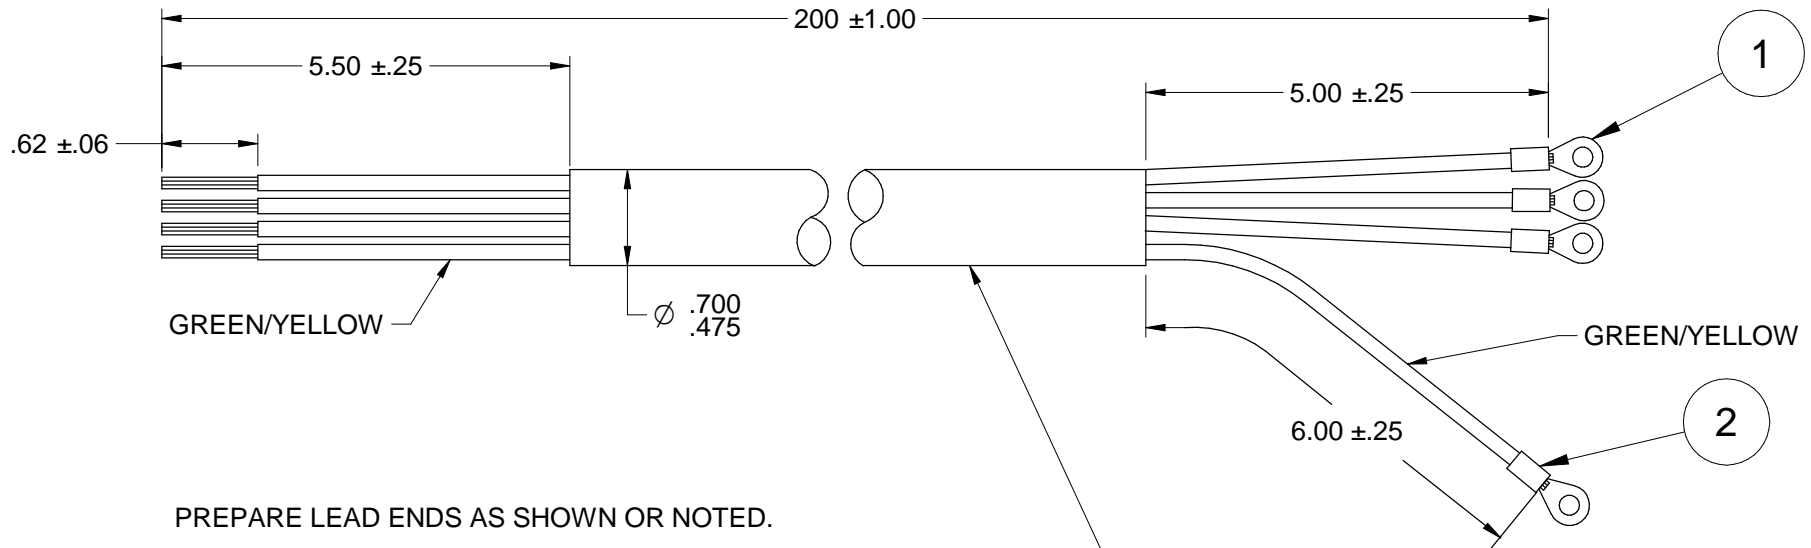

PREPARE LEAD ENDS AS SHOWN OR NOTED.

THE OPERATIONS OF CRIMPING AND/OR INSULATION STRIPPING MUST NOT SEVER MORE THAN A TOTAL OF 7.5% OF THE WIRE STRANDS.

CORDAGE TYPE: H07 RN-F 4 G 6
CURRENT/VOLTAGE RATING: 68A/600V AC
CONDUCTORS: 6mm
JACKET COLOR TO BE BLACK
LEAD COLORS: GREEN / YELLOW, BROWN, BLACK & GRAY.

THIS PART MUST BE RoHS COMPLIANT PER E4253.

PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LINCOLN GLOBAL, INC. AND MAY NOT BE DUPLICATED, COMMUNICATED TO OTHER PARTIES OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINCOLN GLOBAL, INC.

MANUFACTURING TOLERANCE PER E2056
UNLESS OTHERWISE SPECIFIED TOLERANCE:
ON 2 PLACE DECIMALS IS ± .02 in. (± 0.5 mm)
ON 3 PLACE DECIMALS IS ± .002 in. (± 0.05 mm)
ON ALL ANGLES IS ± .5 OF A DEGREE
MATERIAL TOLERANCE ("t") TO AGREE
WITH PUBLISHED STANDARDS.

CONTROL: CLEVELAND
DRAWN BY: pgorg
ENGINEER: -
APPROVED: DAD

SCALE: NONE
IF PRINTED @ A4 SIZE
UNITS: INCH

EQUIPMENT TYPE: MISCELLANEOUS USE
SUBJECT: INPUT LEAD ASSEMBLY
MATERIAL DISPOSITION: UF
APPROVAL DATE: 2/23/2018
PROJECT NUMBER: CRM50905
REFERENCE: S24992-8

PAGE 1 OF 1
DOCUMENT NUMBER: S24992-12
DOCUMENT REVISION: B

DO NOT SCALE THIS DRAWING

SOLID EDGE