AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
G	01.30.09	UPDATE 2D DRAWING AND OPERATING TEMP

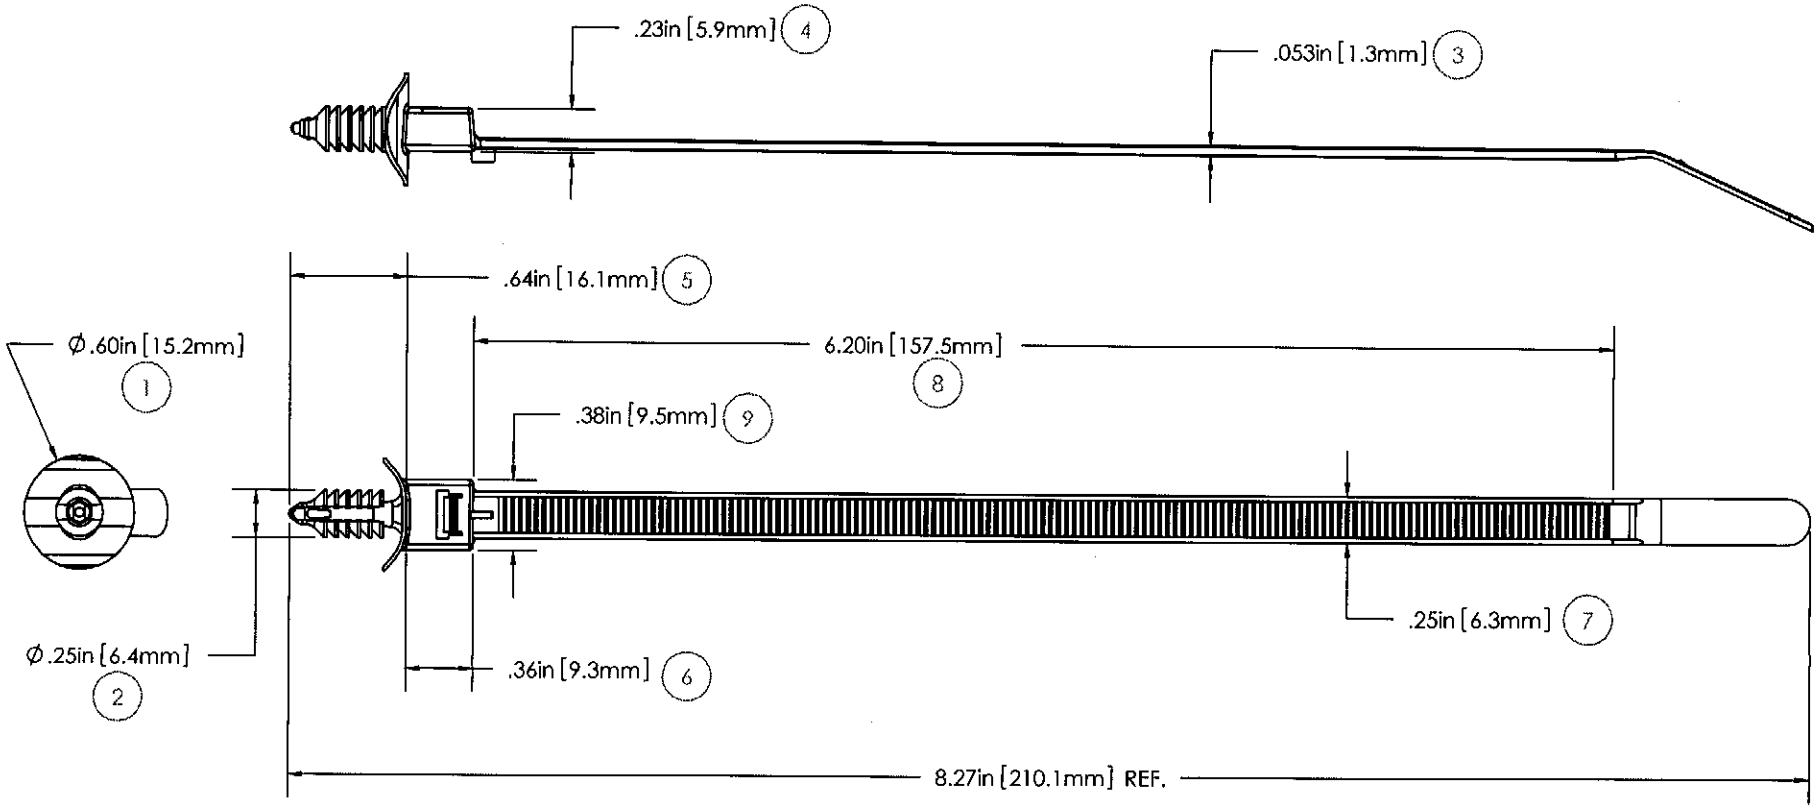

MOUNTING:	M6 THREADED HOLE
TENSILE STRENGTH:	50 LBF (222 N) MIN.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 257°F (125°C)
WEIGHT:	2.10 GRAMS
BUNDLE DIAMETER:	Ø.063IN (1.6MM)/ TO Ø1.75IN (44.5MM)
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNUEM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS: ENG. APPR. 1/30/09 Q.A. APPR. 1-30-09

SPECIFIED TOLERANCES ARE:
.XX ± .03 IN. .X ± .7 MM
.XXX ± .01 IN. .XX ± .25 MM
ANGULAR: ± 2°

MATERIAL: IMPACT MODIFIED NYLON 6/6 PER ASTM D4066 - HEAT STABILIZED

COLOR: BLACK

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION: FIR TREE TIE - SMALL

STOCK NO. 10710

REV. G

5 4 3 2 1