


4 | 3 | 2 | 1

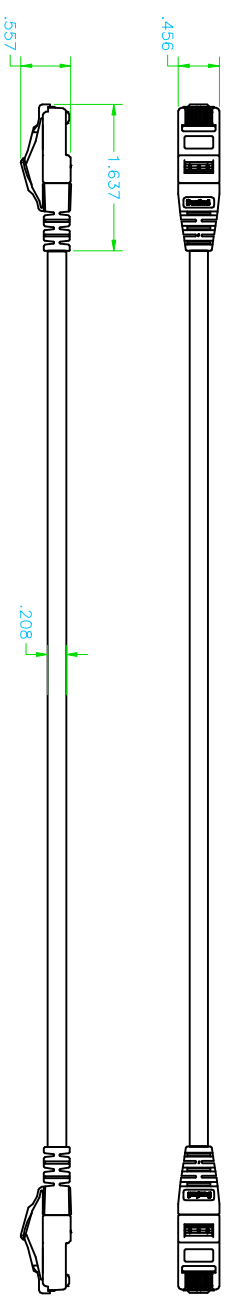

- PIN-OUT
- | | |
|--------------|------|
| RJ45 | RJ45 |
| 1---WH/OR--- | 1 |
| 2---OR/WH--- | 2 |
| 3---WH/GR--- | 3 |
| 4---BL/WH--- | 4 |
| 5---WH/BL--- | 5 |
| 6---GR/WH--- | 6 |
| 7---WH/BR--- | 7 |
| 8---BR/WH--- | 8 |

PRODUCT INFORMATION:

- 1.) 24AWG SOLID BARE COPPER
- 2.) TEMPERATURE RATING
INSTALLATION (0° TO +60°)
OPERATING (-20° TO +60°)
- 3.) CMP RATED
- 4.) CAT 6 LAN IS SWEPT TESTED TO 450MHZ

- REPLACE XX FOR COLOF
- BK = BLACK
 - BL = BLUE
 - GN = GREEN
 - GY = GREY
 - OR = ORANGE
 - PK = PINK
 - PR = PURPLE
 - RD = RED
 - WT = WHITE
 - YL = YELLOW



FILE NAME	CONTRACT NO. N/A		CUSTOMER SPEC
DRAWN 03/05/13 JOSHW	CHAD B	M64BMPAXXCB	
CHECK	APPR. 03/05/13 JOSHW	RJ45/45 CAT 6 LAN PLN	
ISSUED 03/05/13			
SIZE	TSQM NO.	DWG NO.	REV
C		M64BMPAXXCB	A
SCALE	1"0"=1"0" (RIGHT)	N/A	SHEET 1 OF 1

4 | 3 | 2 | 1