


18/2 Type SVT Black



PRODUCT DATA SHEET

SVT is a light-duty service cord, rated at 300 volts with a temperature range up to 105°C. With extra-flexible stranding, PVC primary insulation, and PVC jacket, this cable is designed for indoor use where reduced cable outer diameter is preferred.

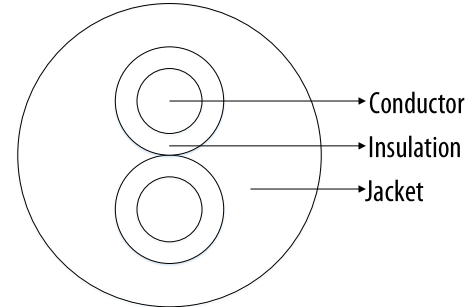

Design Number 10150
Part Number 32049179
Customer Number N/A

Color Code: 1. Black 2. White

CONSTRUCTION

Conductor: Stranded bare copper
Conductor Size: 18AWG(41/34)
Insulation: Polyvinyl chloride (PVC)
Insulation Avg. Thickness: 0.015"(Nom.)
Insulation Diameter: 0.083"(Nom)
Jacket Material: Polyvinyl chloride (PVC)
Jacket Avg. Thickness: 0.030"(Nom.)
Overall Diameter: 0.230"(Nom.)
Jacket Color: Black

Print Legend:

E486041 IH (UL) SVT VW-1 105°C 300V 2/C 18AWG(0.823 mm²) c(UL) SVT FT2
105°C 300V 2/C 18 AWG (0.823 mm²)

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Conductor Resistance @ 25°C: 22.8 Ω/km Max
Flame Test : UL VW-1 and CSA FT2

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Approvals: UL, the basic standard is UL 62 "Flexible Cords and Cables"
c(UL) approved to meet CSA standard C22.2, flexible cords

Application: In accordance with Article 400 of the NEC, applications include vacuum cleaners, household food appliances, home entertainment appliances, and power cords for light-duty equipment

All trademarks are property of their respective owners. All specifications are subject to change.

| Revision History | | |
|------------------|------------|-------------------|
| 00 | 2019/10/09 | Initial release |
| | | |
| | | |
| Created L. Jian | | Approved A. Huang |

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

