


## H05V2-K UL / H07V2-K UL



**H05V2-K UL / H07V2-K UL** are internationally approved harmonized, UL/CSA and AWM/MTW approved PVC European flexible single-conductor wires with increased temperature range for HAR/IEC and higher working voltage for UL-AWM. Due to these increases it is suitable for use in connections and internal wirings of frequency converters. Can be found in appliance wiring and machine tool wiring as well as in control systems. They may also be used in pipes and flexible conduits. Recommended for the internal wiring of apparatus, switchboards and distributor boards in electronic and electrical equipment designed for international use in North American & European countries and for MRO replacement of international made equipment wire.

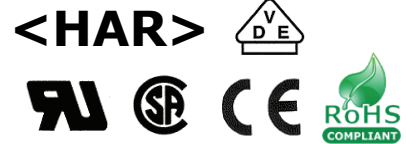

### Construction:

- Fine tinned copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Cl-5
- Special PVC core insulation
- Cores to VDE-0293 colors on chart

- H05V2-K UL (22, 20 & 18 AWG)
- H07V2-K UL (16 AWG and Larger)
- X05V2-K UL & X07V2-K UL for non-HAR colors

### Technical:

- Working voltage: 300/500v (H05V2-K UL)
- Working voltage: 450/750v (H07V2-K UL)
- Working voltage UL(MTW) & CSA: 600v
- Working voltage UL (AWM): 1000v
- Test voltage: 2500 volts (4000 volts UL)
- Flexing/Static bending radius: 10-15 x Ø
- Temp HAR/IEC: -40° to +90° C
- Temp UL-AWM: -40° to +105° C
- Temp UL-MTW: -40° C to +90° C
- Temp CSA-TEW: -40° C to +105° C
- Flame retardant: IEC 60332.1, FT-1
- Insulation resistance: 20 MΩ x km

### Approvals:

- UL-Standard 1063 MTW
- UL-AWM Style 10269
- CSA TEW
- CSA-AWM 1 A/B, FT-1
- <HAR> HD 21.7 S2
- <HAR> H05V2-K / H07V2-K
- VDE-0281 Part-3
- CE Low Voltage Directive 73/23/EEC and 93/68/EEC
- ROHS compliant

| PART NUMBER                          | CORES | NOMINAL OD     | CU LBS/MFT | WT LBS/MFT |
|--------------------------------------|-------|----------------|------------|------------|
| 22 AWG (16/32) 0,50mm2<br>35122**    | 1     | .098" / 2.5mm  | 3          | 7          |
| 20 AWG (24/32) 0,75mm2<br>35120**    | 1     | .106" / 2.7mm  | 5          | 9          |
| 18 AWG (32/32) 1,00mm2<br>35118**    | 1     | .114" / 2.9mm  | 7          | 11         |
| 16 AWG (30/30) 1,50mm2<br>35116**    | 1     | .122" / 3.1mm  | 9          | 13         |
| 14 AWG (50/30) 2,50mm2<br>35114**    | 1     | .145" / 3.7mm  | 16         | 21         |
| 12 AWG (56/28) 4,0mm2<br>35112**     | 1     | .173" / 4.4mm  | 25         | 30         |
| 10 AWG (84/28) 6,0mm2<br>35110**     | 1     | .193" / 4.9mm  | 39         | 42         |
| 8 AWG (80/26) 10,0mm2<br>35108**     | 1     | .267" / 6.8mm  | 64         | 80         |
| 6 AWG (128/26) 16,0mm2<br>35106**    | 1     | .350" / 8.9mm  | 103        | 124        |
| 4 AWG (200/26) 25,0mm2<br>35104**    | 1     | .397" / 10.1mm | 161        | 174        |
| 2 AWG (280/26) 35,0mm2<br>35102**    | 1     | .448" / 11.4mm | 225        | 241        |
| 1 AWG (400/26) 50,0mm2<br>35101**    | 1     | .555" / 14.1mm | 322        | 359        |
| 2/0 AWG (356/24) 70,0mm2<br>35121**  | 1     | .622" / 15.8mm | 451        | 493        |
| 3/0 AWG (485/24) 95,0mm2<br>35131**  | 1     | .712" / 18.1mm | 621        | 624        |
| 4/0 AWG (614/24) 120,0mm2<br>35141** | 1     | .768" / 19.5mm | 773        | 778        |

### Color Code Chart

- 00 - Green/Yellow
- 01 - Black
- 02 - Blue (RAL5015)
- 03 - Brown
- 04 - Red
- 05 - White
- 06 - Gray
- 07 - Violet
- 08 - Pink
- 09 - Orange
- 10 - Transparent (Non HAR)
- 11 - Yellow (Non HAR)
- 12 - Green (Non HAR)
- 13 - Beige
- 14 - Dark Blue (RAL5010)

Insert a 2-digit color code from the Color Code Chart for the \*\* found at the end of the proper part number.  
i.e. - 3512002 - H05V2-K UL, 20 AWG (0,75mm2) Blue, OR 3500803 - H07V2-K UL, 8 AWG (10,0mm2) Brown

\* Additional AWG sizes & colors may be available.