

Revisions				
Rev.	Description	Date	Edit By	

Number of Conductors: 16
 Awg/strand: 24 awg (7/32) Tinned Plated Copper
 Strand O.D.: .024" Nominal
 Primary Insulation: .010" Nominal wall PVC
 Primary O.D.: .045" +/- .002"

Color Code:


- | | |
|------------|------------------|
| 1: Green | 2: Violet |
| 3: White | 4: Gray |
| 5: Black | 6: Black/White |
| 7: Red | 8: Red/White |
| 9: Blue | 10: Blue/White |
| 11: Brown | 12: Brown/White |
| 13: Orange | 14: Orange/White |
| 15: Yellow | 16: Yellow/White |

Center Filler: Fibulated Polypropylene for Roundness

Cabled: 16 Conductors Cabled 3.25" Left Hand Lay

Separator: Tissue Paper

Jacket: .035" Nominal Wall Polyurethane
 Pressure Extruded for Roundness
 Jacket Color: Black
 Jacket Printed: None
 Jacket and Primary Insulation Rated: 90°C 300Volts
 Finished O.D.: .285" +/- .005"

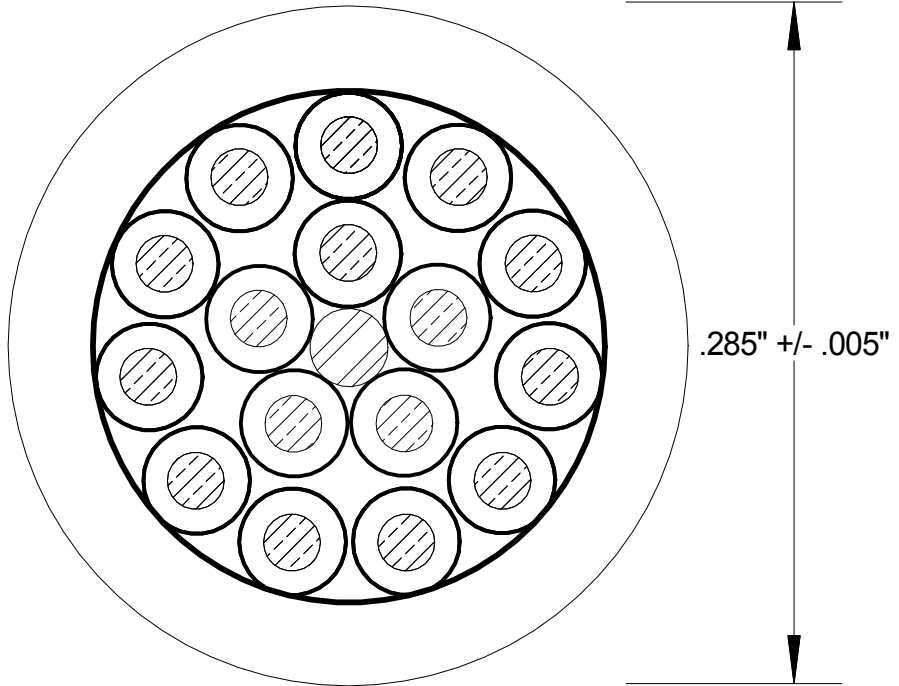

Drawing #:	Rev.
------------	------

