

0.75mm²(24/0.20mm) Equipment Wire

Def. Stan. 61-12 Part 6 Type 2

BS 4808 Part 2 Class 2




PRODUCT DATA SHEET

Reference Standard

0.75mm² 24/0.2mm Equipment Wire DEF.STAN 61-12 Part 6 Type 2
BS4808: Part 2 Class 2

Design Number 10296
Part Number See Table
Customer Number N/A

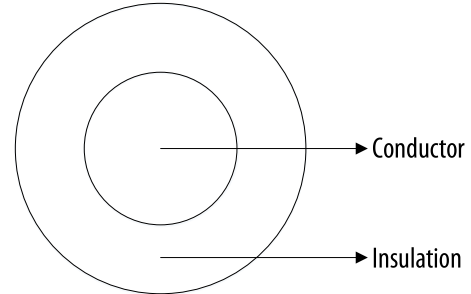

CONSTRUCTION

Conductor: Tinned annealed copper
Conductor Size: 0.75mm²(24/0.20mm)
Conductor Diameter: 1.13mm
Insulation: PVC
Insulation Thickness: 0.40mm(Nom.)
Insulated O.D: 2.0±0.15mm
Insulation Color: A variety of insulation colors available

ELECTRICAL&PHYSICAL CHARACTERISTICS

Operating Temperature (°C): -25°C to +85°C
Operating Voltage: 1000V
Conductor DC Resistance@20°C: 25.2 Ω/km Max
Insulation DC Resistance@20°C: 10 MΩ.km Min
Dielectric Test: 3 kV/1 min
Flame Performance : UL 1581 VW-1 & IEC 60332-1
RoHS Compliance: European Directive 2015/863/EU

Part Number Table					
Part Number	Color	Package	Part Number	Color	Package
32051891	Black	100m	32051904	Black	500m
32051893	Red		32051905	Red	
32031897	Blue		32051906	Blue	
32051899	Grey		32051907	Grey	
32051900	White		32051908	White	
32051901	Pink		32051909	Pink	
32051896	Green				
32051892	Brown				
32051895	Yellow				
32051894	Orange				
32051898	Violet				
32051902	Green/yellow				
32051903	Yellow/green				

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/05/18	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

