

Hueson Wire 38 Suton Street Northbridge, MA 01534 508-234-6372

bhanlon@huesonwire.com

Issue Date: 10/19/2017

Construction Issue: 3

Description:	4/C 18 19/30 TC PVC/PUR				
Component:	4 Conductors				
Conductor:	18 AWG 19/30 Tinned Copper to ASTM B-8				
Insulation:	0.022" Premium Grade PVC	0.092"			
Color Code:	Black #1, Black #2, Black #3, Green/Yellow Example follows: 1-ONE 1-ONE 1-ONE				
Cable Assembly:	4 Conductors Cabled				
Separator:	.001" Tissue Separator Tape Pulled in at Jacketing				
Jacket:	0.053" Polyurethane Pressure Extruded	0.335"			
Jacket Color:	Orange	0.335"			

Print: Black Ink

SV-CP-P - - - E174416 RU AWM-20234 80C 600V - - - cRU AWM II A 80C 600V FT-1


Specifications:	AWM Style	Temp	<u>Voltage</u>	<u>Flame</u>	
UL	AWM-20234	308	600	FT-1	
Canadian cRU	AWM	308	600	FT-1	II A/B

## **Environmental Compliance**

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:

This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH

• California Prop 65:

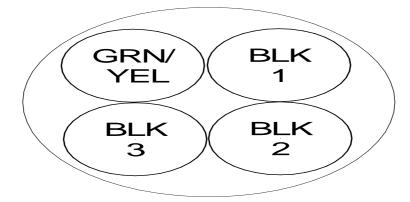

Spacing is approximately ½" (measured from the end of one marking to the beginning of the next marking).