




Copper Primary Wire
18GA 19X30T PTF UV INH WT
PRESTOTOUGH - 600V
125°C

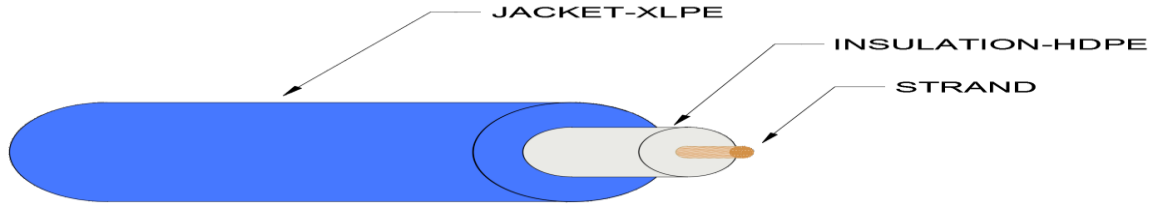

Conductor

Size: 18 GA
 Number of Strands: 19
 Strand OD, Nom: 30 GA (0.0100 in)
 Conductor: Tinned Copper

Insulation

Insulation Material: 125°C HDPE (High Density polyethylene)
 Diameter, Min: 1.90 mm (0.075 in)
 Diameter, Max: 1.95 mm (0.077 in)

Jacket

Jacket Material: 125°C XLPE (Cross-linked polyethylene)
 Min Wall: 0.28 mm (0.011 in)
 Nom Wall: 0.40 mm (0.016 in)
 Diameter, Min: 2.05 mm (0.081 in)
 Diameter, Max: 2.20 mm (0.087 in)
 Strip Force, Min: 3 lbs (13.3 N)
 Strip Force, Max: 10 lbs (44.5 N)

Temperature Rating: -40°C to 125°C
 Voltage Rating: 600 Volts
 Specifications: SAE J1128 TXL (Custom Diameter)
 SAE J1654
 GM: GMW 15626 Class C Thin Wall (Scrape & Abrasion Only)
 Prestolite: ES-235 (Strip Force)
 Prestolite: UV Inhibitor
 Packaging: Drums
 Color: White
 Print Legend: NA
 Part Number: 155859-21
 Other: RoHS Compliant