



DUNBAR-DC-M221

2:1 SHRINK RATIO, FLEXIBLE, FLAME RETARDANT, POLYOLEFIN TUBING

Applications

DUNBAR-DC-M221 is a flexible, flame retardant, heat shrinkable polyolefin tube. It is designed for a wide range of applications including insulation for electric & electronic devices, wire strain relief, and protective covering for parts such as resistors and capacitors.

Features

- ★ Shrink ratio: 50% or more in the radial direction, 5% or less in the axial direction
- ★ In stock for immediate shipments
- ★ Continuous operating temperature: - 55°C (-67°F) to 135°C (275°F)
- ★ Flammability: UL VW-1, CSA OFT (except clear)
- ★ High resistance to abrasion, chemicals, and oils

Standard

- ★ Meets the material and performance specification of AS23053/5 Class 1, Clear is Class 2 Not QPL (Mil-Spec) Approved
- ★ UL 224 (File Number: E319303)
- ★ RoHS2 & REACH Compliant

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile strength	ASTM D638	Min. 1,500 psi
		Elongation		Min. 200%
	Aged	Elongation	ASTM D638	Min. 100%
	Fluid Resist.	Tensile strength	24°C/24 hrs	Min. 1,000 psi
		Dielectric strength	6 Fluids	Min. 400 Volts/mil
	Concentricity		ASTM D2671	Min. 70%
	Heat shock		250°C/4 hrs	No cracks, flowing or dripping
	Low temperature flexibility		- 55°C/4 hrs	No cracking
	Secant modulus		ASTM D882	Max. 25,000 psi
	Specific gravity		ASTM D792	Max. 1.35 (Max. 1.00 Clear)
Electrical	Dielectric strength		ASTM D2671	Min. 500 Volts/mil
	Volume resistivity		ASTM D876	Min. 10 ¹⁴ Ω - cm
Chemical	Copper corrosion		175°C/16 hrs	No corrosion
	Fungus resistance		ASTM G21	No growth
	Water Absorption		ASTM D570	Max. 0.5%
	Flammability		ASTM D2671	Pass

Rev. June 2018




Dunbar Products, LLC
Tubing and Identification Products

1302 Champion Circle, Carrollton, Texas 75006
Tel: (469) 568-0800
Fax: (469) 568-0808



DUNBAR-DC-M221

2:1 SHRINK RATIO, FLEXIBLE, FLAME RETARDANT, POLYOLEFIN TUBING

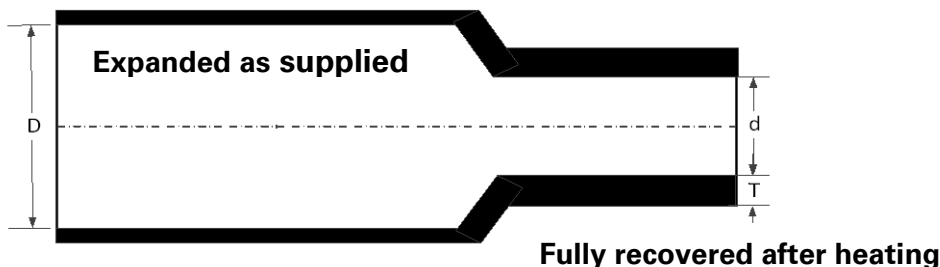

Product Dimensions

Minimum Shrink Temperature: 90°C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (min.) (D)		Internal Diameter (max.) (d)		Wall Thickness (min.) (T)		
	In.	mm	In.	mm	In.	mm	Ft.
3/64"	0.046	1.2	0.023	0.6	0.013	0.3	500
1/16"	0.063	1.6	0.031	0.8	0.014	0.3	500
3/32"	0.093	2.4	0.046	1.2	0.017	0.4	500
1/8"	0.125	3.2	0.062	1.6	0.017	0.4	500
3/16"	0.187	4.7	0.093	2.4	0.017	0.4	250
1/4"	0.250	6.4	0.125	3.2	0.022	0.5	250
5/16"	0.331	8.4	0.157	4.0	0.022	0.5	250
3/8"	0.375	9.5	0.187	4.7	0.022	0.5	200
1/2"	0.500	12.7	0.250	6.4	0.022	0.5	200
5/8"	0.657	16.7	0.315	8.0	0.027	0.7	200
3/4"	0.750	19.1	0.375	9.5	0.027	0.7	100
1"	1.000	25.4	0.500	12.7	0.030	0.7	100
1-1/4"	1.291	32.8	0.630	16.0	0.034	0.8	100
1-1/2"	1.50	38.1	0.750	19.10	0.034	0.8	100
2"	2.00	50.8	1.00	25.4	0.038	0.9	100
3"	3.00	76.2	1.5	38.1	0.042	1.0	100
4"	4.00	101.6	2.0	50.8	0.046	1.2	100
5"	5.00	127.0	2.5	63.5	0.046	1.2	100

Rev. June 2018



Dunbar Products, LLC
Tubing and Identification Products

1302 Champion Circle, Carrollton, Texas 75006
Tel: (469) 568-0800
Fax: (469) 568-0808