


YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:

Company:

**"This is an uncontrolled document once printed"**

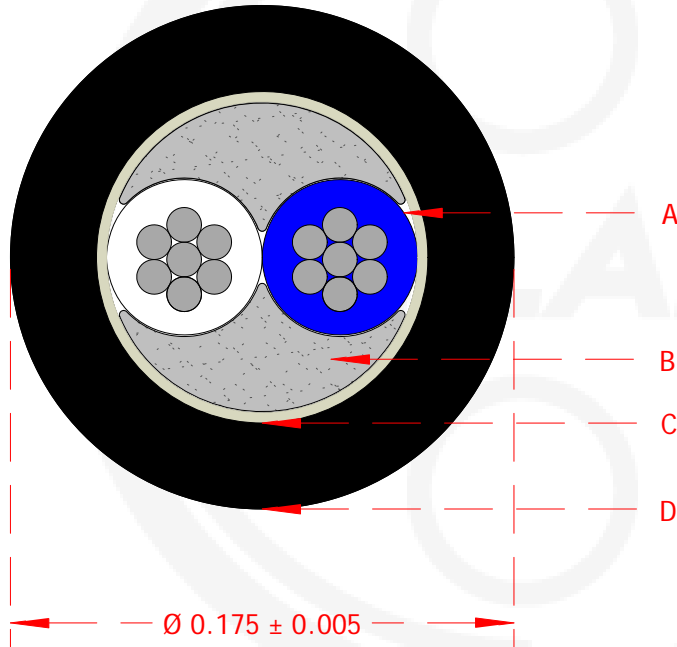

A: 20 AWG 2 Conductor PVC insulated  
 Wire Size & Stranding: 20 AWG 7/0.0121  
 Metal Type: Annealed Tinned Copper  
 Nominal Wire Diameter: 0.0363

Insulation Type: Polyvinylchloride  
 Nominal Insulation Thickness: 0.009  
 Nominal Conductor Diameter: 0.0543  
 Color Code: White & Blue

B: Fibrillated Polypropylene Fillers

C: Tissue wrap binder - 100% coverage

Nominal Cable Lay Length: 1.75 LHL (6.85 tw/ft)

D: Polyurethane Jacket, Nominal Jacket Thickness: 0.030, Pressure Extruded,  
 Color: Matte Black, Temperature Range: -40°C to +90°C

Print Legend: N/A

Spacing between Markings: 12 - 18 inches intervals

Footage Markers: N/A

Ripcord: Not required

Weight: 21 Lbs/Mft

Cable Round Finish: Level 2 or better

Cable Finish: Matte



**20AWG 2C 7STR TC PVC  
 O/A THERMOPLASTIC URETHANE JACKET**

All Dimensions are Shown In Inches

**PROPRIETARY DOCUMENT**

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection

Drawn By: RIR Scale: 15 : 1

Cust. #: 220-P3

REV -

Reviewed By: - Sheet: 1 of 1

Lake's #: S202CTPU/X-LC

REV -

Cage Code: N/A

Date Created: 01/22/18

Revision

Description

Approved By

Date