

Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

IEWC P/N 32057845

Issue Date: 2/19/2018

Construction

Hueson C5853

Issue: 1

Description:	2/C 20 26/34 TC PVC/PVC	Diam. (In)
Component:	2 Conductors	
Conductor:	20 AWG 26/34 Tinned Copper 1/2" ASTM B 174-71, B 33-74	0.0367"
Insulation:	0.01" Premium Grade PVC	0.0567"
Color Code:	Yellow + Blue	0.0567"
Cable Assembly:	2 Conductors Cabled	0.113"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.113"
Separator:	Non-Woven Polyester or Clear Mylar Tape for Stripability 25% Overlap	0.117"
Jacket:	0.035" PVC CMG FT-4	0.183"
Jacket Color:	Gray	0.183"

Print: E194074 20 AWG (UL) TYPE CM 75C OR AWM 2464 80C 300V VW-1 --- LL109360 CSA TYPE CMG 75C FT4

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	
UL	AWM-2464	-20 - +80°C	300	Dual Listed to UL Type CM and CSA Type CMG
Canadian cUL	AWM	-20 - +80°C	300	FT-4

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ180070



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 2/19/2018
Issue: 1

Drawing/Rotation:

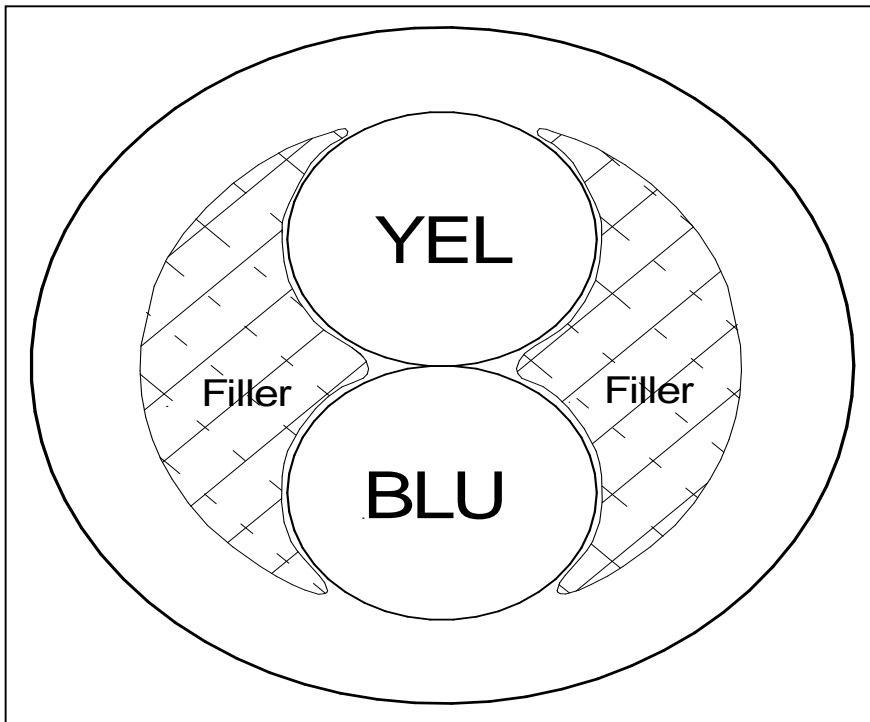

IQ180070