


Revisions			
Rev.	Description	Date	Edit By
A	5/C 18 41/34 BC PVC/PVC	5/2/19	RL



Insulated Conductors	
AWG and Stranding	18 AWG 41/34 Bare Copper
Conductor Count	5
Insulation Material	PVC
Insulation Wall Thickness	0015"
Overall Cabling	
Fillers	Solid PVC Filler
Shielding	36 AWG Tinned Cu Braid, 85% Cov.
Binders/Separator	None
Strength Members	None
Outer Jacket	
Jacket Material (Color)	PVC (Clear)
Jacket Wall Thickness	0.035" Nominal
Electrical	
Maximum Operating Voltage - UL	600V
Temperature Rating	105°C
DC Resistance Nominal	(18 AWG) 6.5 Ohms/1000ft Nom.
Approvals	
UL AWM Style 2661 105°C 300V VW-1	

IEWC PART #: 32057871	Rev. A
-----------------------	--------

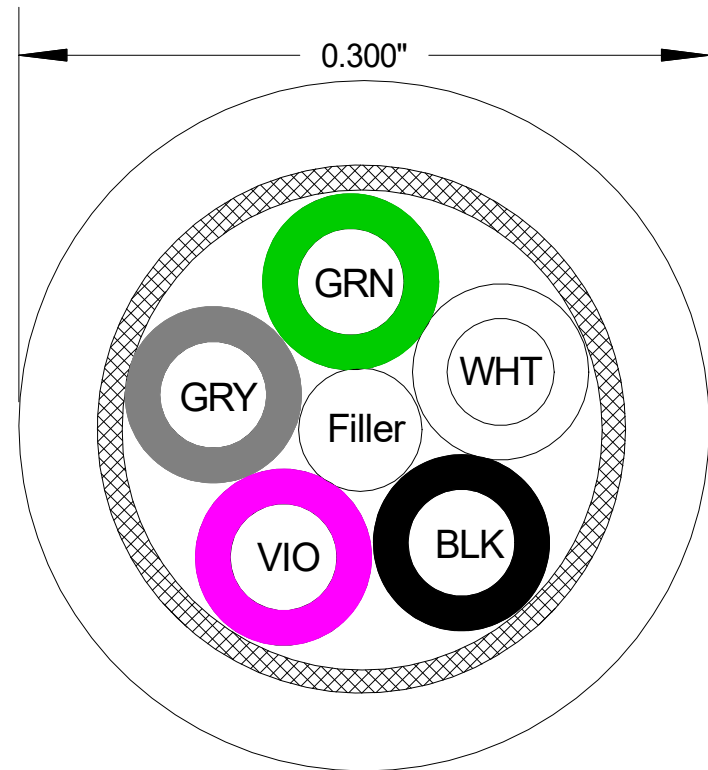