


CLEAR GROUNDING CABLE

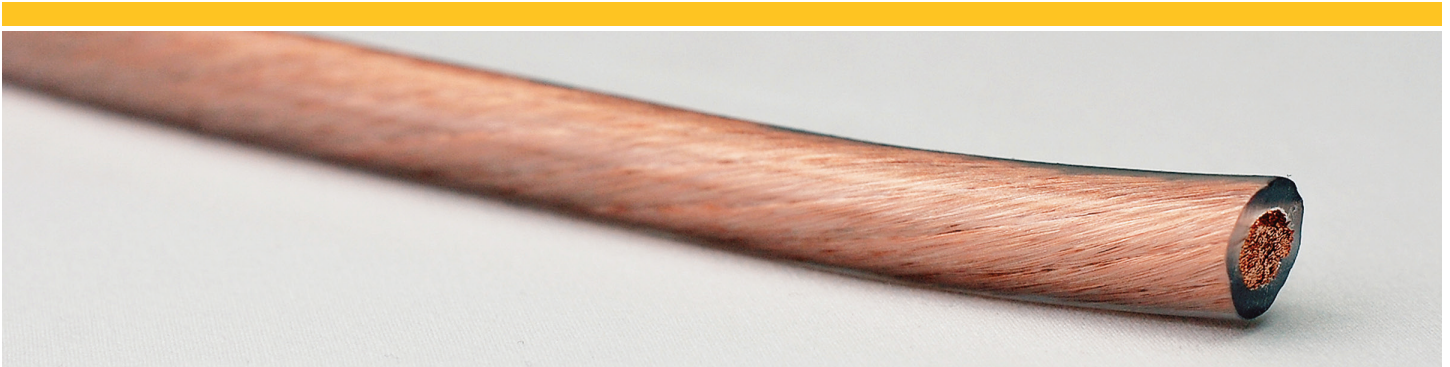

FEATURES

- Jacket meets the operating temperature range and flame retardancy of ASTM F-855 Type III
- Heavier jacket walls provide extra protection for copper conductor.
- Excellent cold weather properties to -40°C exceeding ASTM F-855.
- Superior maximum operating temperature range up to 90°C exceeding ASTM F-855 Type III
- Water resistant
- Special stranding and packaging are available upon request.
- Custom print available upon request.

APPLICATIONS

- Temporary grounding for de-energized overhead electrical lines and de-energized electrical equipment.

CONSTRUCTION

Highly flexible stranded No. 30 bare copper conductor insulated with a high grade RoHS compliant 90°C clear PVC.

CLEAR GROUNDING CABLE



GAUGE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE	SHIPPING WEIGHT -LBS/ 1000 FT.
		in	mm	in	mm		
2	7/95/.010	0.110	2.79	0.530	13.46	500 or 1000	287
1/0	19/56/.010	0.127	3.23	0.650	16.51	500 or 1000	445
2/0	19/70/.010	0.127	3.23	0.700	17.78	500 or 1000	545
3/0	19/88/010	0.142	3.61	0.784	19.91	500 or 1000	684
4/0	19/111/.010	0.142	3.61	0.850	21.59	500 or 1000	839