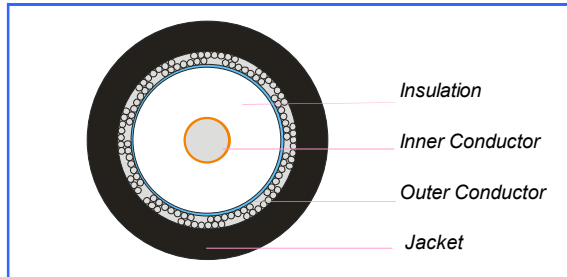
**PAR-600**

Low Loss 50 Ohm Wireless RF Transmission Cable

Part No. : 3273

Cross Section**Electrical Characteristics**

Characteristic Impedance	50+/- 2 ohm
Capacitance	77 pF/m
Velocity ratio	87 %
DCR: Inner Conductor	< 1.7 ohm/km
DCR: Outer Conductor	< 3.9 ohm/km
Jacket Sparker	8000 V RMS
Dielectric Strength	4000 V DC
Insulation resistance	> 10,000 MΩ·km
Peak Power	40 KW

Shielding Effectiveness	>90 dB
--------------------------------	--------

SWR	30-2500 MHz	< 1.25
------------	-------------	--------

Inductance	0.19 uH/m
-------------------	-----------

Attenuation (at 20 °C)	dB/100m	Power kw
30 MHz	1.40	5.51
50 MHz	1.80	4.24
150 MHz	3.20	2.41
220 MHz	3.90	1.97
450 MHz	5.60	1.35
900 MHz	8.20	0.93
1500 MHz	10.90	0.70
1800 MHz	12.10	0.63
2000 MHz	12.80	0.59
2500 MHz	14.50	0.52
5800 MHz	23.80	0.32

Maximum attenuation is 10% higher.

Cable Description

Inner Conductor	CCA
Conductor Dia.	4.47+/-0.02mm
Min.Break Strength	1700 N
Insulation	Foam P.E.
Insulation Dia.	11.56 +/-0.15mm
Color	Neutral
Centricity	≥ 85%
Adhesion	10 to 100N @25mm
Shielding	AL/P-Foil (Bonded)
Foil overlap	≥ 115 %
Outer Conductor	TC Wire Braid
Coverage	95 +/-3%
Overall Braid	12.45 +/-0.10mm
Jacket	PE/ PVC / LSZH
Outer Dia	14.99 +/-0.15mm
Color	According to customer

Marking

According to customer

PACKAGING

According to customer

Mechanical Characteristics

Min.Bending Radius:	
Installation	38.5 mm
Repeated	153 mm
Max.Pulling Tension	1750
Crush resistance of cable (load of 700N)	< 1 %
Rated Temperature	
Storage/operating temperature	-40~+85 °C
Outdoor Installation	-5°C
Weight per foot of cable	0.81 kg

Revision History

Defined by: Bob	Rev: A/0
Prepared by: Zell	Date: 2014-03-06
Approved by: D.L. Chin	Page: 1 of 1

RoHS Guideline

Cadmium content (Cd)	< 0.01 %
Lead content (Pb)	<0.1 %
Mercury content (Hg)	<0.1 %
Chromium (VI) content	<0.1 %
Polybrominated Biphenyls (PBB)	<0.1 %
Polybrominated Diphenyl Ether (PBDE)	<0.1 %

PAN-ASIA CABLE LIMITED

Room 1404-08, 14th Floor , Hing Yip Commercial Centre,
272-284 Des Voeux Road Central, Hong Kong
Tel : (852) 3110 2071 Fax : (852) 3110 2073
E-mail :info@pan-asiacable.com
Http://www.pan-asiacable.com