



CABLE TECHNOLOGY, INC.


73 RIVER ROAD - WILLINGTON, CT 06279 - (860) 429 - 7889 FAX (860) 429 - 3615

ALPHA EQUAL 65404 CT-E466I

-
- CONDUCTOR:** #14 41/30 BARE COPPER INSULATED WITH .022" PVC
- CABLING:** CABLE FOUR (4) CONDUCTORS TOGETHER WITH FILLER
3.4 TWISTS/FT MIN
- TAPE SEPARATOR:** WRAP WITH A PAPER TAPE, 25% MIN OVERLAP
- JACKET:** .055" OIL RESISTANT CHROME GRAY PVC
- NOM OD:** .404" +/- .020"
- PRINT IN BLACK:** 4C 14 AWG (2.08mm²)... E151405 14 AWG TYPE CM 90C (UL)...AWM
STYLE 2587 90C 600V VW-1...c(UL) TYPE CMH FT-1 ...ROHS...CE
- COLOR CODE:** 1-3) BLACK NUMBERED 1 TO 3
4) GREEN-YELLOW

PROPERTIES

- | | |
|----------------------|--|
| 1) TEMPERATURE RANGE | -40 TO 90°C (STATIC), -5 TO 90°C (DYNAMIC) |
| 2) BEND RADIUS | 5X CABLE DIAMETER (STATIC & DYNAMIC) |
| 3) PULL TENSION | 129 LBS, MAX |
| 4) VOLTAGE RATING | 600 VRMS |
| 5) CAPACITANCE | 31 PF/FT @ 1 KHZ, NOM COND TO COND |
| 6) INDUCTANCE | 0.17 μH/FT, NOM |
| 7) CONDUCTOR DCR | 2.6 Ω/1000FT @ 20°C, NOM |

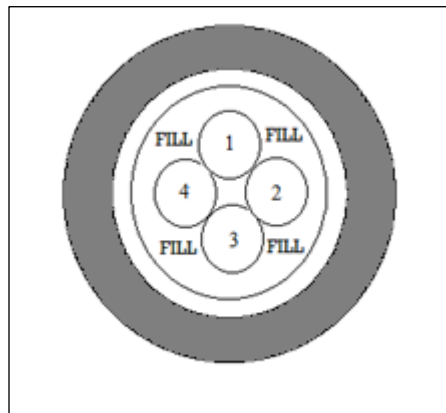

I HAVE REVIEW ABOVE SPECIFICATION AND IT CONFORMS TO ITEM ORDERED UNDER
PO# _____
NOTE AND EXCEPTIONS HERE →

SIGNED: _____ DATED: _____
A65404EQ
