

2 Special Wire PVC 1×AWG22 20KV UL 3239

Caleb Cable Caleb Cable Industrial Limited

Revision History

Part NO: C3-337	Price NO: C3-0291
Prepared by: CXY	Date: 2018/3/6
Approved by:	Page: 1 of 1

Product Code: 2 Special Wire PVC 1×AWG22 20KV UL 3239

Product Description

Application:

flexible connecting cable for use in telecom

Reference Standard

Cabel spec.and the general standard


Multi-construction

Cable Construction

1.Conductor	Tinned Copper
Construction	T0.25±0.008×7
Stranded Dia. (mm)	0.76
2.Insulation	XL-LDPE
Thickness	0.52
Insulation Dia.mm)	1.80±0.10
Insulation Color	Nature
3.Inner Jacket	PVC
Thickness(mm)	0.70
Dia.(mm)	3.20±0.15
Jacket Color	White
4.Spiral Shield	Tinned Copper
Construction(mm)	T0.12±0.01x83
5.Outer Jacket	PVC
Thickness(mm)	0.85
Dia.(mm)	5.20±0.20
Jacket Color	Red(RAL3000)
Marking(Ink Black,once per meter)	
Hi Voltage Coaxial Cable 22AWG 20KV 105C + Tested to UL 3239	
{Meter Mark]	
PACKAGING	
500M/Reel	
Label	

2 Special Wire PVC 1×AWG22 Red 500M RoHS2(2011/65/EU) Compliant 5326 RG ????

Design

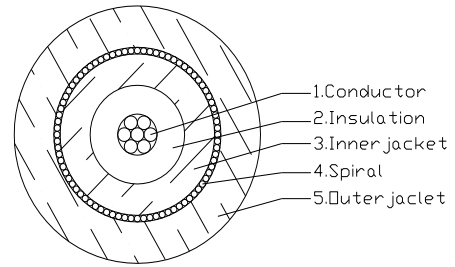

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω/Km)	56.1
Min.Insulation DC Resistance at 20°C (MQ*KM)	>5000
Rated Temperature(°C)	105
Rated Voltage	20KV DC

