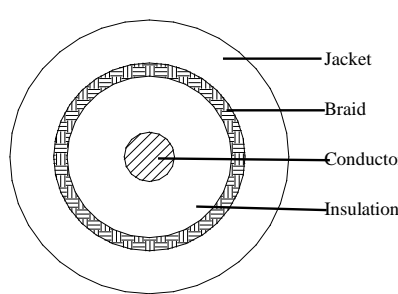


Product Specification

Part No.:BV-3038		Color																																													
<p align="center">Cross Section</p> 		<p>Insulation: Nature</p>																																													
		<p>Jacket: Per request</p>																																													
<p align="center">Marking</p> <p>RG-174/U</p>		<p align="center">Performance</p>																																													
<p align="center">Description</p> <p>Rated Voltage (V) 30 Rated Temperature (°C) 80 The Insulation and Jacket is lead free.</p> <p>Application For communication and signal control systems</p>		<p>Electrical Characteristics:</p> <table border="0"> <tr> <td>Max. Inner Conductor DC Resistance at 20°C (Ω/km)</td> <td align="right">146</td> </tr> <tr> <td>Characteristic Impedance(Ω)</td> <td align="right">50±3.5</td> </tr> <tr> <td>Capacitance(pF/m)</td> <td align="right">115(Max)</td> </tr> <tr> <td>Velocity of propagation</td> <td align="right">66%</td> </tr> </table>		Max. Inner Conductor DC Resistance at 20°C (Ω/km)	146	Characteristic Impedance(Ω)	50±3.5	Capacitance(pF/m)	115(Max)	Velocity of propagation	66%																																				
Max. Inner Conductor DC Resistance at 20°C (Ω/km)	146																																														
Characteristic Impedance(Ω)	50±3.5																																														
Capacitance(pF/m)	115(Max)																																														
Velocity of propagation	66%																																														
<p>Reference Standard Customer's spec&Mil-C-17</p>		<table border="0"> <tr> <td>Attenuation(dB/1m)</td> <td>Freq.(MHz)</td> <td>Attn.(dB/1m)</td> </tr> <tr> <td></td> <td>30</td> <td>0.203</td> </tr> <tr> <td></td> <td>200</td> <td>0.524</td> </tr> <tr> <td></td> <td>1000</td> <td>1.000</td> </tr> </table>		Attenuation(dB/1m)	Freq.(MHz)	Attn.(dB/1m)		30	0.203		200	0.524		1000	1.000																																
Attenuation(dB/1m)	Freq.(MHz)	Attn.(dB/1m)																																													
	30	0.203																																													
	200	0.524																																													
	1000	1.000																																													
<p align="center">Construction</p> <table border="0"> <tr> <td>1 Cores</td> <td></td> </tr> <tr> <td>Conductor</td> <td>Stranded Bare Copper</td> </tr> <tr> <td>AWG</td> <td>26</td> </tr> <tr> <td>Construction(mm)</td> <td>7/0.156</td> </tr> <tr> <td>Dia. (mm)</td> <td>0.468</td> </tr> <tr> <td>Insulation</td> <td>PE</td> </tr> <tr> <td>Min. Thickness (mm)</td> <td>0.38</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td>0.47</td> </tr> <tr> <td>Insulation Dia. (±0.08mm)</td> <td>1.40</td> </tr> <tr> <td>Braid</td> <td>Tinned Copper</td> </tr> <tr> <td>Construction(mm)</td> <td>16/4/0.10</td> </tr> <tr> <td>Coverage</td> <td>≥90%</td> </tr> <tr> <td>Jacket</td> <td>PVC</td> </tr> <tr> <td>Min. Thickness (mm)</td> <td>0.30</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td>0.37</td> </tr> <tr> <td>Dia. (±0.10mm)</td> <td>2.54</td> </tr> </table>		1 Cores		Conductor	Stranded Bare Copper	AWG	26	Construction(mm)	7/0.156	Dia. (mm)	0.468	Insulation	PE	Min. Thickness (mm)	0.38	Nom. Thickness (mm)	0.47	Insulation Dia. (±0.08mm)	1.40	Braid	Tinned Copper	Construction(mm)	16/4/0.10	Coverage	≥90%	Jacket	PVC	Min. Thickness (mm)	0.30	Nom. Thickness (mm)	0.37	Dia. (±0.10mm)	2.54	<p align="center">Sample Record</p> <table border="0"> <tr> <td>Sample No. :</td> <td></td> <td>Rev.:</td> <td></td> </tr> <tr> <td>Original spec no.:</td> <td></td> <td>Rev.:</td> <td></td> </tr> <tr> <td>Ref. spec No. : SK-BV-3038</td> <td></td> <td>Rev.:</td> <td>0</td> </tr> </table>		Sample No. :		Rev.:		Original spec no.:		Rev.:		Ref. spec No. : SK-BV-3038		Rev.:	0
1 Cores																																															
Conductor	Stranded Bare Copper																																														
AWG	26																																														
Construction(mm)	7/0.156																																														
Dia. (mm)	0.468																																														
Insulation	PE																																														
Min. Thickness (mm)	0.38																																														
Nom. Thickness (mm)	0.47																																														
Insulation Dia. (±0.08mm)	1.40																																														
Braid	Tinned Copper																																														
Construction(mm)	16/4/0.10																																														
Coverage	≥90%																																														
Jacket	PVC																																														
Min. Thickness (mm)	0.30																																														
Nom. Thickness (mm)	0.37																																														
Dia. (±0.10mm)	2.54																																														
Sample No. :		Rev.:																																													
Original spec no.:		Rev.:																																													
Ref. spec No. : SK-BV-3038		Rev.:	0																																												
<p align="center">Revision History</p>		<p>Prepared by: WAYNE 2012/11/10 Table No.:T100 Rev.: 0 Approved by: CICICHENG 2012/11/10 Page 1 of 1</p>																																													