
DATE: 3/14/2018 7C-183-264-STP REVISION: A

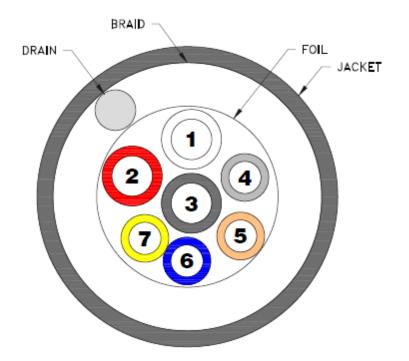

DESCRIPTION: SPECIAL COMPOSITE CABLE (1PR 26, 2C26, 3C18) SHIELDED

CONDUCTORS: 1-3 18 AWG 16/30 TINNED COPPER .010" SR PVC .066" OD (PER UL1061)

WHITE, RED, BLACK

4-5 26 AWG 7/34 TINNED COPPER .010" SR PVC .039" OD (PER UL1061)

GRAY, ORANGE

6-7 PAIR: 26 AWG 7/34 TINNED COPPER .010" SR PVC .039" OD (PER UL1061)

BLUE PAIRED WITH YELLOW 3 TO 4.3 TWISTS PER INCH

TAPE SHIELD: ALUMINUM/POLYESTER/ALUMINUM (CONDUCTIVE ON BOTH SIDES) 100% COVERAGE

DRAIN WIRE: #18 16/30 TINNED COPPER

BRAID SHIELD: 80% MIN COVERAGE TINNED COPPER

SEPARATOR: PAPER TAPE

JACKET: PRESSURE EXTRUDED BLACK POLYURETHANE

OD: .300" NOMINAL (.310" MAX)

JACKET PRINT

IN WHITE INK: 7C-183-264-STP...E83208 RU AWM STYLE 20668 90C 300V...CRU AWM I/II A/B 90C

300V...ROHS...CE...-40C TO +105C...UV RESISTANT FOR OUTDOOR USE

RATINGS : -40C TO +105C

UV RESISTANT FOR OUTDOOR USE

DRAWING IS NOT TO SCALE, FOR REPRESENTATION ONLY, CONDUCTOR PLACEMENT/ROTATION MAY BE DIFFERENT



PART NO:	TBD		
REVISION:	Α		PWNW
	ROI	HS COMP	LIANT