


CABLE SPECIFICATIONS:

DESCRIPTION: SEVEN (7) CONDUCTOR 24AWG CABLE WITH TWO (2) 24AWG DRAIN WIRES
 CONDUCTOR SIZE: 24AWG (7/32) MULTI-STRANDED TINNED COPPER
 INSULATION: POLYETHYLENE
 COLORS: BLUE, RED, BLACK, WHITE, BROWN, ORANGE, GREEN
 INSULATION THICKNESS: .010" NOMINAL
 DRAIN WIRES: (2) 24AWG (7/32) MULTI-STRANDED TINNED COPPER
 SHIELDING: ALUMINUM MYLAR TAPE
 CABLE JACKET: BLACK (FR) POLYURETHANE
 CABLE DIAMETER: .210"±.005 (COIN ROUND)
 JACKET THICKNESS: .035" NOMINAL

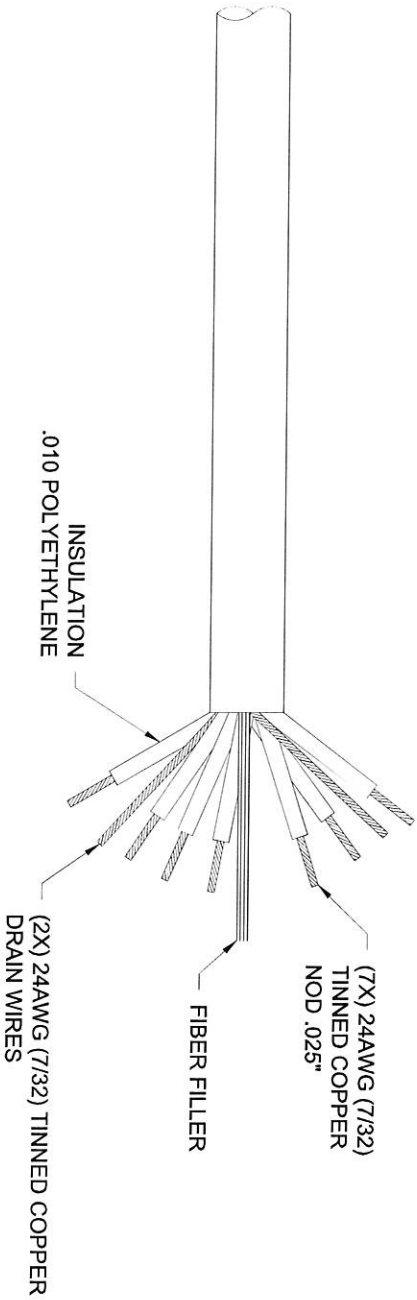

- NOTES:**
1. RoHS 2 2011/65/EU DECLARATION OF CONFORMITY IS REQUIRED
 2. PREVIOUSLY GP:50 P/N: S72684

| | | | | | |
|---|---------------|------------------------|---------|--|------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | REVISIONS | | 2770 LONG ROAD GRAND ISLAND, NY 14072 TEL. NO. (716)773-9300 FAX NO. (716)773-5019 CAGE CODE: ON8Y77 | |
| FRACTIONS: ±1/64 | DECIMALS: .XX | LET | DATE | BY | EON |
| TOLERANCES: .XX ±.01 | .XX ±.005 | - | 5/26/17 | WED | 2266 |
| ANGLES: ±1/2° | | | | | |
| 5.0/ MACHINE FINISH (A1: SERRATED) REMOVE BURRS & BREAK SHARP EDGES MACHINE FILLETS TO .015R MAX. ALL DIAMETERS TO BE CONCENTRIC WITHIN .010 T.I.R. CHAMFER ALL MALE THREADS 45°±.10° MINOR DIAMETER THREADS 90°±.10° TO MAJOR DIAMETER | | THIRD ANGLE PROJECTION | | SEE ENGINEERING CHANGE NOTICE (ECN) FOR DRAWING APPROVALS SCALE: N/A MATERIAL: SEE SPECS DRAWING NO.: 1V6-56 SHEET 1 OF 1 | |
| TITLE: CABLE, POLYURETHANE JACKET, 7-COND., 24AWG, 2 DRAIN | | | | | |

