


16 AWG 2 Conductor Riser Fire Alarm Cable

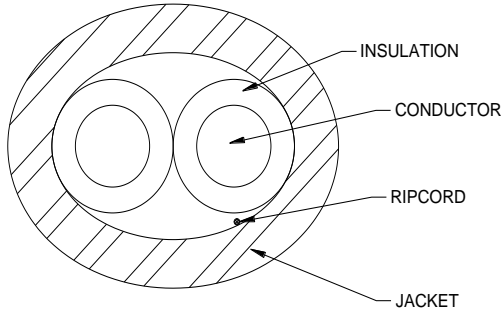

1. Construction:

- 1.1. Conductors: 16 AWG Solid Bare Copper 0.051” Nominal Diameter
- 1.2. Insulation: SR-PVC, 0.065” Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6” LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Red SR-PVC, 0.158” Nominal Diameter

1.7. Jacket Print:

COMTRAN CABLE LLC 16 AWG FPLR/CL3R/CMR
(UL) OR C(UL)US CMG RoHS (01-12345)
000002

(01-12345) = Traceability Code
Sequential Footage Markings Every Two Feet

2. Compliance:



- 2.1. C(UL)US Listed Type CMG
- 2.2. UL Listed Type FPLR/CL3R/CMR
- 2.3. UL Subject 444 Communications Cables
- 2.4. UL1424, Power Limited Fire Alarm Cable
- 2.5. UL 13, Power Limited Circuit Cable
- 2.6. UL 1666, Riser Flame Test
- 2.7. NEC Article 760, 725 and 800
- 2.8. California State Fire Marshal Approved
- 2.9. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 27 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 4.02Ω/1000 FT Nominal @ 20°C

4. Electrical Characteristics:

- 4.1. Cable Weight: 22 Lbs./1000FT Nominal

TITLE:		DESCRIPTION		Comtran Cable LLC 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		  <small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>	
DS38698		16 AWG 2 Conductor Riser Fire Alarm Cable					
Rev	Date	Detail	Eng.	App.			
6	04/17/18	Added cable weight	PB	WC			
5	03/22/16	Update to current format; add drawing	PB	RN			
4	07/19/06	Tri rate and add RoHS to print	2me	RHW			7
3	02/03/04	Add Capacitance	2me	RHW			
2	06/02/03	Revised and redrawn	2me	RHW			

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document