


14 AWG 2 Conductor Riser Fire Alarm Cable

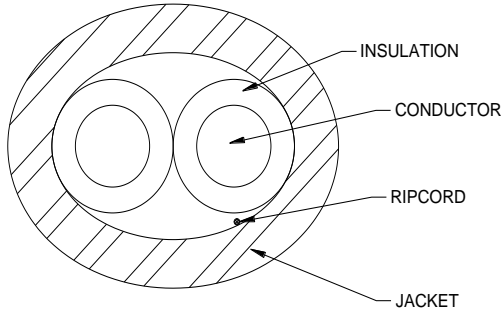

1. Construction:

- 1.1. Conductors: 14 AWG Solid Bare Copper 0.064” Nominal Diameter
- 1.2. Insulation: SR-PVC, 0.082” Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6” LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Red SR-PVC, 0.192” Nominal Diameter

1.7. Jacket Print:

COMTRAN CABLE LLC 14 AWG FPLR/CL3R (UL)
RoHS (01-12345) 000002

(01-12345) = Traceability Code
Sequential Footage Markings Every Two Feet

2. Compliance:



- 2.1. UL Listed Type FPLR/CL3R
- 2.2. UL1424, Power Limited Fire Alarm Cable
- 2.3. UL 13, Power Limited Circuit Cable
- 2.4. UL 1666, Riser Flame Test
- 2.5. NEC Article 760, 725
- 2.6. California State Fire Marshal Approved
- 2.7. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 37 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 2.6Ω/1000 FT Nominal @ 20°C

4. Physical Characteristics:

- 4.1. Cable Weight: 32 Lbs./1000 Ft. Nominal

TITLE:		DESCRIPTION		Comtran Cable LLC 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 	
DS38700		14 AWG 2 Conductor Riser Fire Alarm Cable					
Rev	Date	Detail		Eng.	App.		
8	04/17/18	Added weight		PB	WC		
7	03/23/16	Update to current format; add drawing		PB	RN	7	
6	07/19/06	Dual rate and add RoHS to print; revise lay		2me	RHW		
5	05/05/05	Revised and redrawn		2me	RHW		

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document