



DESCRIPTION: 18/4 CABLE 80C 300V		UNITS: IN	SCALE: 12:1	ITEM	SPECIFICATIONS
----------------------------------	--	-----------	-------------	------	----------------

CUSTOMER: IEWC	NWI P/N: TBD	DWG NO: 72234-1		A.	SUB ASSEMBLY TWISTED PAIR
----------------	--------------	-----------------	--	----	---------------------------

CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 4/11/2018	REV: 1	B.	POLY FILLER
-------------------	---------------------	-----------------	--------	----	-------------

CORE DIMENSIONS FOR INTERNAL USE ONLY				C.	18 GAUGE 41x34BC BUNCHED
				D.	16 MIL XLPE INSULATION 125C 300V 13 MIL MIN. XLPE INSULATION O.D. .080 ±.002
				E.	TISSUE PAPER SEPARATOR
				F.	30 MIL PRESSURED TPU JACKET 80C 300V 24 MIL MIN. BLACK POLYURETHANE JACKET NO AGENCY APPROVALS
				ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU	


DRAFT

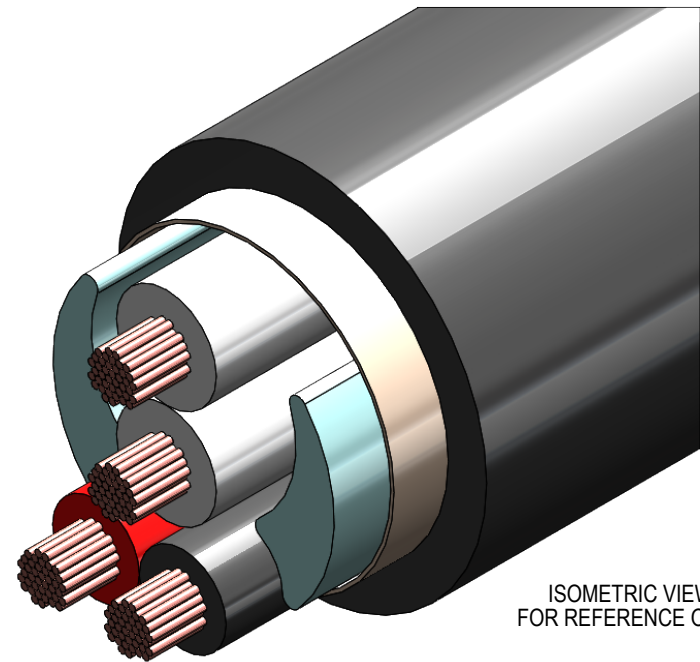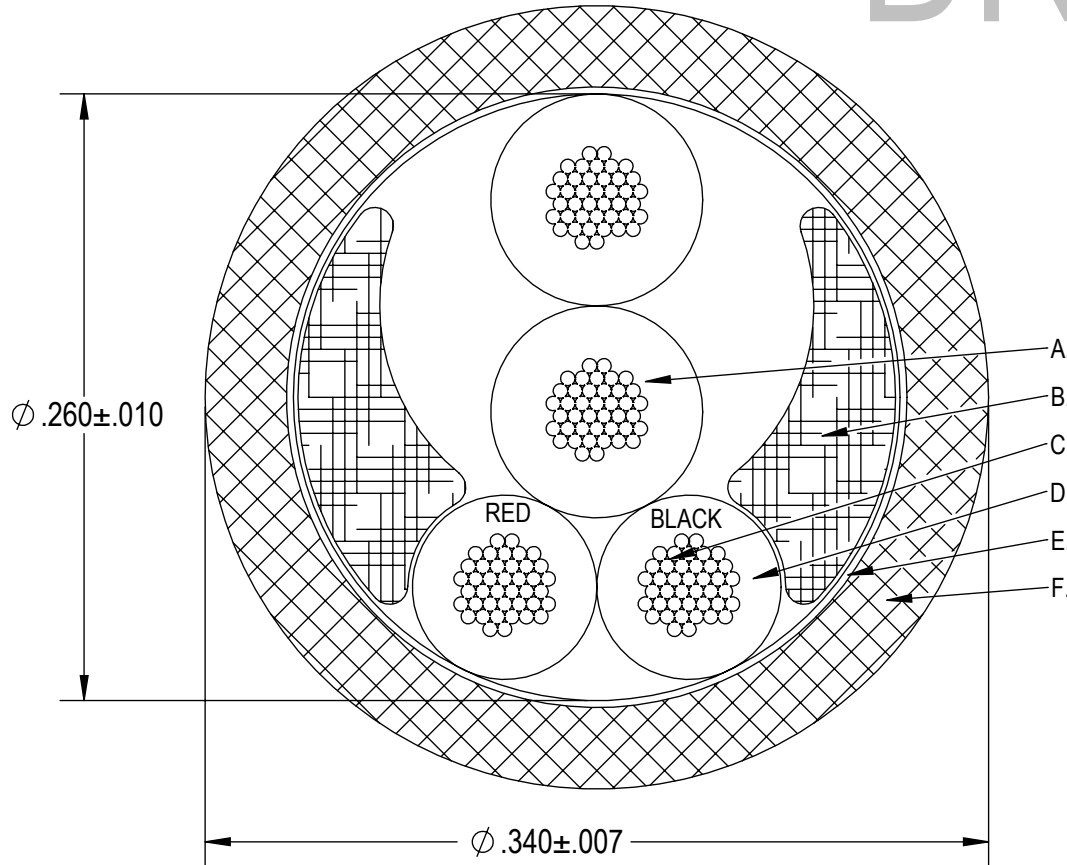

ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS

DESCRIPTION: 18/4 CABLE 80C 300V		UNITS: IN	SCALE: 60:1	ITEM	SUB-ASSEMBLY SPECIFICATIONS
CUSTOMER: IEWC	NWI P/N: TBD	DWG NO: 72234-1		A.	18 GAUGE 41x34BC BUNCHED
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 4/11/2018	REV: 1		

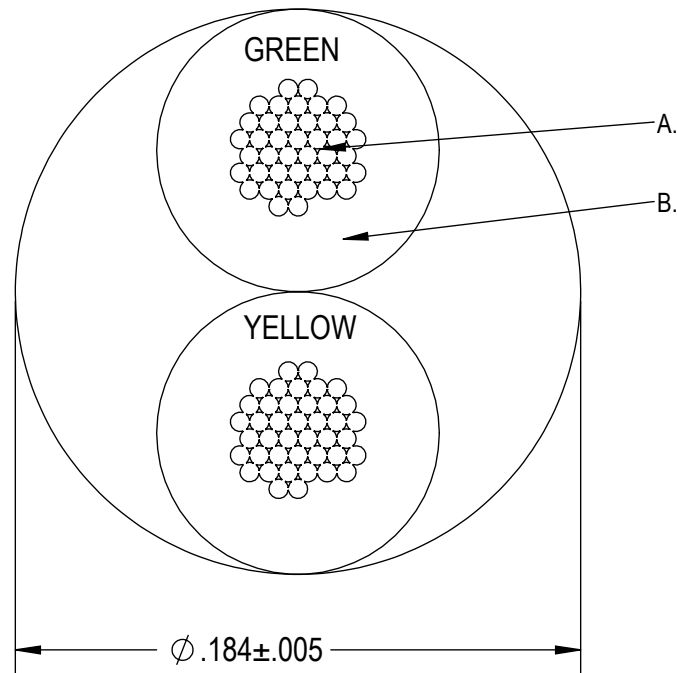



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 18/4 CABLE 80C 300V		UNITS: IN	SCALE: 60:1	ELECTRICAL REQUIREMENTS
CUSTOMER: IEWC	NWI P/N: TBD	DWG NO: 72234-1		IMPEDANCE ON PAIR: 120 ± 15 Ohms
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 4/11/2018	REV: 1	



**MECHANICAL REQUIREMENTS**

CABLE GOES OVER A 2 INCH BEND RADIUS  
 SPEED OF TRAVEL IS 30 FT PER MINUTE  
 EXIT RADIUS FROM BENDSITE IS 45 TO 90°

INITIAL RELEASE	1	4/11/18	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			